

# CS-1262



## master view™

### • DVI KVM Switch

→ CS-1262 2 Port KVM Switch improves on previous KVM Switch designs by incorporating DVI video and audio. Now, two computers can be accessed and controlled from a single PS/2 keyboard, DVI monitor, and PS/2 mouse console.

**Patent NO. :** US 6464197 (USA) ,TW 081926 (Taiwan) ,CN ZL 01260527.1 (China) ,CN ZL 02301203.X (China)


## I Features :

- Control two computers from one DVI monitor,one PS/2 keyboards,one PS/2 mouse console.
- DVI interface technology to ensure crisp and clean digital and analog display.
- Audio Enabled.
- Bi-directional switching and flexible interoperability: switch permits independent PC,and audio functions.
- Buzzer ON/OFF via hotkey.
- Supports PS/2 keyboards and mice including M/S IntelliMouse (Pro),Explorer and Optical mice.
- Support 1600x1200 high resolution,DDC2B
- Computer selection via push button and hotkey.
- OS Compatibility:DOS、 WIN98、 WIN ME、 WIN NT、 WIN 2K、 WIN 2003、 WIN XP and LINUX.

## I Package Content :

- 1x CS-1262 DVI KVM Switch
- 2x KVM Cables (2L-7D02P)
- 1x Power Adapter
- 1x User Manual
- 1x Quick Start Guide

## I Diagram :

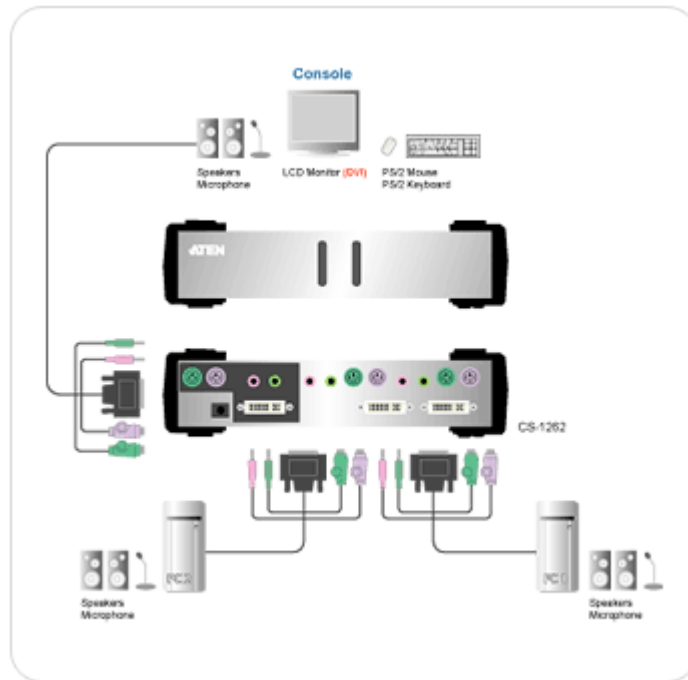

## I Specification :

<b>Computer Connections</b>		2	
<b>Computer Port Selection</b>		Push buttons, Hotkeys	
<b>Audio Port Selection</b>		Hotkeys	
<b>Connectors</b>	Console	Keyboard	1 x Mini Din- 6 female (Purple)
		Video	1 x DVI-I female (White)
		Mouse	1 x Mini Din- 6 female (Green)
		Audio	1 x Stereo Earphone Jack female (Green) 1 x Microphone Jack female (Pink)
	Computers	Keyboard	2 x Mini Din- 6 female (Purple)
		Video	2 x DVI-I female (White)
		Mouse	2 x Mini Din- 6 female (Green)
		Audio	2 x Stereo Earphone Jack female (Green) 2 x Microphone jack female (Pink)
Power Adapter		1 x DC Jack	
<b>LEDs</b>	On Line	2 (Orange)	
	Selected	2 (Green)	
<b>Button</b>	Port Selection	2 x Push button	
<b>Keyboard / Mouse Emulation</b>		PS/2	
<b>VGA Resolution</b>		1600 x 1200; DDC2B	
<b>Power Consumption</b>		DC5.3V, 1.35W	
<b>Scan Interval</b>		1~99 seconds(5 seconds default)	

<b>Operating temperature</b>	0°C~50°C
<b>Storage temperature</b>	-20°C~60°C
<b>Humidity</b>	0~80% RH, Noncondensing
<b>Housing</b>	Metal
<b>Weight</b>	0.7kg
<b>Dimensions ( L x W x H )</b>	21 x 8.5 x 5.5 cm

- \* The specification and pictures are subject to change without notice.
- \* All trademarks and logos are the properties of their respective holders.



**Headquarter Germany:**  
**SPHINX Computer Vertriebs GmbH**  
 Phone: +49 (0) 6201 75437  
[www.sphinxcomputer.de](http://www.sphinxcomputer.de)  
[mail@sphinxcomputer.de](mailto:mail@sphinxcomputer.de)

**Subsidiary France:**  
**SPHINX Connect France**  
 Phone: +33 (0) 2 51 09 26 60  
[www.sphinxconnect.com](http://www.sphinxconnect.com)  
[mail@sphinxconnect.com](mailto:mail@sphinxconnect.com)

**Subsidiary Germany:**  
**SPHINX Connect GmbH**  
 Phone: +49 (0) 711 7287 5750  
[www.sphinxconnect.de](http://www.sphinxconnect.de)  
[mail@sphinxconnect.de](mailto:mail@sphinxconnect.de)

**Branch Office Belgium**  
 Phone: +32 26 39 39 48  
[www.sphinxconnect.com](http://www.sphinxconnect.com)  
[benelux@sphinxconnect.com](mailto:benelux@sphinxconnect.com)

**Subsidiary Austria:**  
**S-Connect Vertriebs GmbH**  
 Phone: +43 (1) 504 84 78 0  
[www.s-connect.at](http://www.s-connect.at)  
[mail@s-connect.at](mailto:mail@s-connect.at)

**Branch Office Spain**  
 Phone: +34 913 109 823  
[www.s-connect-espana.com](http://www.s-connect-espana.com)  
[mail@s-connect-espana.com](mailto:mail@s-connect-espana.com)

**Subsidiary Great Britain:**  
**S-Connect Ltd.**  
 Phone: +44 (0) 1276 203 10  
[www.s-connect.ltd.uk](http://www.s-connect.ltd.uk)  
[mail@s-connect.ltd.uk](mailto:mail@s-connect.ltd.uk)

**Sales Partner Switzerland:**  
**VISONET AG**  
 Phone: +41 41 768 05 80  
[www.visonet.ch](http://www.visonet.ch)  
[info@visonet.ch](mailto:info@visonet.ch)