

CL-1758



master view[™]max

• Slideaway LCD KVM Switch

→ CL-1758 LCD KVM Switch features a 15" or 17" LCD monitor, keyboard and touch pad, and can be comfortably mounted in less than 1U of rack space.

I Features :

- Integrated KVM console with 15" or 17" LCD monitor - in Less than 1U high mountable rack.
- Space saving technology - two consoles (one bus) controls 8 computers.
- Cascadable to three levels for control of up to 512 computers from a Single Person Installation.
- Dual Interface Support - PS/2 or USB keyboard and mouse data transfer from the switch to the computer.
- No software required - convenient computer selection via mouse driven intuitive On Screen Display (OSD) menus and Hotkeys.
- Hot pluggable-add or remove computers without having to power down the switch.
- Two level password security - only authorized users view and control the computers - up to four users plus an administrator with separate profiles for each.
- DDC Emulation of the LCD Monitor - VGA settings of every connected computer are automatically adjusted for optimal output to the LCD Monitor.
- Upgradable firmware
- OS Compatibility: WIN98SE, WIN ME, WIN 2K, WIN 2003, WIN XP, LINUX, Mac OS 8.6/9/10 and SUN Solaris 8/9 (For PC compatible computers only. Mac and Sun computers must use the USB cable)


Rack Mounting Kit	Depth
Long (Optional)	68cm - 110cm
Short (Standard)	42cm - 82cm

Easy Installation Rack Mounting Kit	Depth
Long (Optional)	68cm - 105cm
Short (Optional)	52cm - 70cm

Package Content :

- 1x CL-1758 KVM Switch with Standard Rack Mounting Kit
- 2x KVM Cable (1x 2L-5702P, 1x 2L-5202U)
- 1x Firmware Upgrade Cable
- 1x Power Cord
- 1x User Manual
- 1x Quick Start Guide

Diagram :

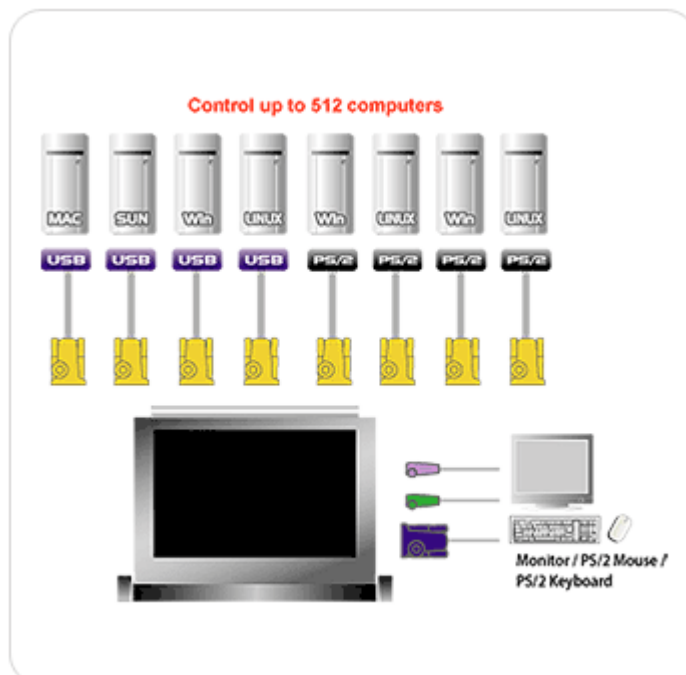

I Specification :

Computer Connections	Direct	8	
	Max	512 (via Cascade)	
Port Selection		OSD (On Screen Display); Hotkeys; button	
LEDs	Max	8 (Orange)	
	Selected	8 (Green)	
	Power	1 (Blue)	
Connectors	CPU Ports		8 x SPHD-15 Female(Yellow)
	External Console	Keyboard	1 x Min Din-6 Female (Purple)
		Mouse	1 x Min Din-6 Female (Green)
		Monitor	1 x HDB-15 Female (Blue)
	Power		3 prong AC Socket
	FW Upgr.		1 x RJ-11
Switches	FW Upgrade Rec.	1 x Slide	
	Power	1 x Rocker	
Scan Interval (OSD Select)		User Specified: 1 - 255 secs.	
Emulation	Keyboard	PS/2	
	Mouse	PS/2	
Video		15" LCD: 1024 x 768; DDC2B 17" LCD: 1280 x 1024; DDC2B	
I/P Rating		100-240 VGA;50/60Hz;1A (Max)	
Power Consumption		15" LCD: 120V 60Hz 24.8W / 230V 50Hz 54.6W 17" LCD: 120V 60Hz 35.8W / 230V 50Hz 69W	
Operating Temperature		0 ∇ - 40 ∇ C	
Storage Temperature		-20 ∇ - 60 ∇ C	
Humidity		0 - 80% RH	
Housing		Metal	
Weight		15" LCD: 14.5kg 17" LCD: 14.9kg	
Dimensions (L x W x H)		62.66 x 48 x 4.4 cm	

* The specification and pictures are subject to change without notice.

* All trademarks and logos are the properties of their respective holders.



Headquarter Germany:
SPHINX Computer Vertriebs GmbH
Phone: +49 (0) 6201 75437
www.sphinxcomputer.de
mail@sphinxcomputer.de

Subsidiary France:
SPHINX Connect France
Phone: +33 (0) 2 51 09 26 60
www.sphinxconnect.com
mail@sphinxconnect.com

Subsidiary Germany:
SPHINX Connect GmbH
Phone: +49 (0) 711 7287 5750
www.sphinxconnect.de
mail@sphinxconnect.de

Branch Office Belgium
Phone: +32 26 39 39 48
www.sphinxconnect.com
benelux@sphinxconnect.com

Subsidiary Austria:
S-Connect Vertriebs GmbH
Phone: +43 (1) 504 84 78 0
www.s-connect.at
mail@s-connect.at

Branch Office Spain
Phone: +34 913 109 823
www.s-connect-espana.com
mail@s-connect-espana.com

Subsidiary Great Britain:
S-Connect Ltd.
Phone: +44 (0) 1276 203 10
www.s-connect.ltd.uk
mail@s-connect.ltd.uk

Sales Partner Switzerland:
VISONET AG
Phone: +41 41 768 05 80
www.visonet.ch
info@visonet.ch