
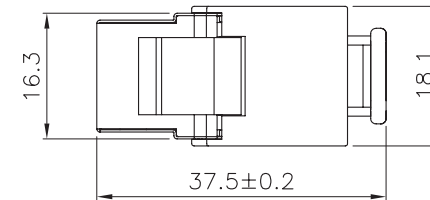

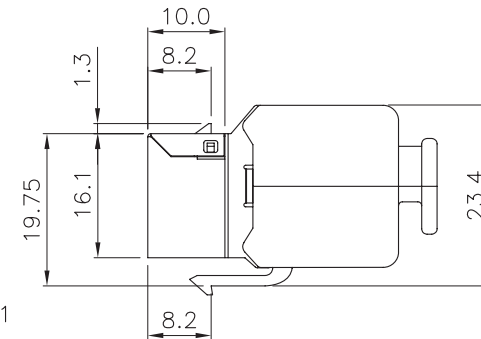


SCALE 1/1



Specification :

Material :

1. Shield : Bronze with Nickel plated.
2. Plastic Housing : ABS + PC, UL 94V-2.
3. RJ45 Jack Contact material & finished :
 - 3-1. Phosphor Bronze, Round pin.
 - 3-2. Min. 50 micro-inch Gold plating over 50-60 micro-inch Nickel plated.
4. IDC Housing : Polycarbonate, UL 94V-2.
5. IDC Terminal material & finished :
 - 5-1. Phosphor Bronze with 50 micro-inch Tin plating over 50-60 micro-inch Nickel plated.
 - 5-2. 110 & Krone tool compatible.
 - 5-3. Use for 22-26 AWG stranded & solid wire.
6. IDC CAP : Zinc die-casting with Nickel plated.

Performance :

- a. The IDC color codes combine two wirings of T568A & T568B.
- b. Insertion Force : 900 gms for 8 contacts.
- c. Retention Strength : 7.7 kgs between Jack and Plug.
- d. Operation Temperature : -40°C to 80°C.
- e. Durability :
 - e-1. Jack : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
 - e-2. IDC : Max. 200 punching times.
- f. The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

GENERAL TOLERANCE OF DIMENSIONS

X.XXX ±0.005
X.XX ±0.05
X.X ±0.1



**Keystone Jack Cat.6, full shielded,
LSA+ punch down connector**