


Digi One[®] IAP

Device Server



Digi One IAP is designed for industrial serial-to-Ethernet connectivity, protocol conversion and protocol interoperability. It is ideal for industrial applications requiring specific industry protocol support and where device management and monitoring is critical.

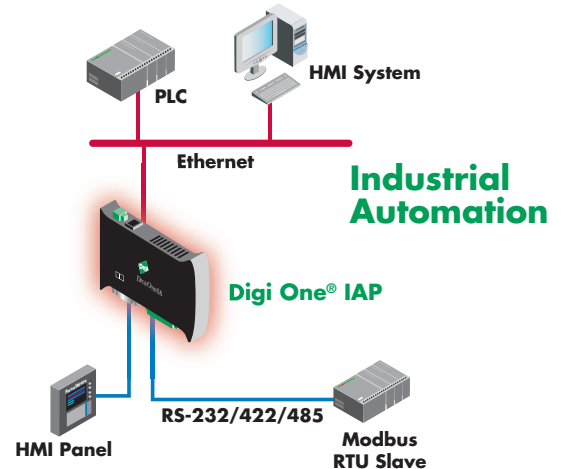

Features/Benefits

- > Industrial serial-to-Ethernet converter and protocol bridge
- > TCP/UDP and RealPort COM/TTY remote COM port access
- > Multi-master/multi-protocol concurrent support for Allen-Bradley and Modbus protocols
- > Serial and Ethernet protocol bridging support for Allen-Bradley and Modbus protocols promotes interoperability
- > ASCII to protocol translation for Allen-Bradley and Modbus
- > Industrial DIN rail mounting
- > DB-9M and screw terminal block serial ports
- > RS-232/422/485 switch selectable in field
- > Second serial port can be used as a pass-through port
- > Class 1, Div 2 rated
- > Tunable for low latency or optimized throughput

Overview

Digi One IAP provides a means of connectivity and interoperability of serial and Industrial Ethernet devices such as Programmable Logic Controllers (PLCs), process and quality equipment, motors, drives, bar-code readers, operator displays and other types of manufacturing equipment.

Digi One IAP is a device server and a protocol bridge rolled into one. The device server functionality allows virtually any device with a serial port to be connected to a TCP/IP network. Applications may communicate with the serial device using TCP/UDP or Digi's patented RealPort[®] COM port redirection for remote native COM port access.

The protocol conversion portion enables Digi One IAP to actually bridge together two industrial devices, whether serial, Ethernet or both, as long as they speak any of the supported serial (DF1, Modbus, ASCII) or Ethernet (Modbus/TCP, A-B/Ethernet, EtherNet/IP) protocols. It also allows for multi-master access, which means that many masters can simultaneously communicate with a single slave, even if they are using different protocols. In addition, Digi One IAP is able to convert ASCII data from scales, bar-code readers, RFID devices, cameras and other devices to Industrial Ethernet protocols.

Digi One IAP provides another unique feature – a second serial port which can act as a pass-through port. This means that a local serial device like an HMI panel can communicate through Digi One IAP to a PLC slave, without disrupting the serial-to-Ethernet connection to its master application across the network.

Digi International makes device networking easy by developing products and technologies that are cost-effective and easy to use. With over 20 million ports shipped worldwide, Digi has been offering the highest levels of performance, flexibility, and quality since 1985.



www.digi.com

Making
DEVICE NETWORKING
easy[™]

Features/Specifications

FEATURES

- 10/100Base-T Ethernet support
- DB-9M and screw terminal block serial ports
- DB-9M can be enabled as second direct RS-232 port connection to device on screw terminal
- RS-232/422/485 switch-selectable serial port with DB-9M and screw terminal connectors
- TCP/UDP Socket Services
- Support for 64 concurrent socket connections
- Web browser configurable
- Patented RealPort technology for COM and TTY ports
- SNMP (read/write)
- PPP
- DHCP/RARP, ARP-Ping, Static IP for IP address assignment
- Digi Port Authority – Remote management diagnostics and auto-discovery tool
- Flash upgradeable firmware
- Baud rates up to 230 Kbps
- Protocol bridge support
 - Ethernet protocols: Modbus/TCP, EtherNet/IP, Allen-Bradley Ethernet
 - Serial protocols: ASCII, DF1, Modbus RTU/ASCII
- Multi-master support for above plus Omron and user-defined serial protocols
- 35 mm DIN rail mounting
- Removable screw terminal for power
- Powered Ethernet 802.3af (midspan) support and fail-over capability when used with 9-30VDC input
- LED status for serial signals, power, Ethernet and diagnostics
- Full modem and hardware flow control
- <6 ms serial over Ethernet latency

ENVIRONMENTAL

- Operating temperature: 0° C to 60° C (32° F to 140° F)
- Relative humidity: 5% to 90% (non-condensing)
- Ethernet isolation: 1500VAC min per IEEE 802.3/ANSI X3.263
- Serial port protection (ESD): +15 kV air GAP and +8 kV contact discharge per IEC 1000-4-2

POWER REQUIREMENTS

- 9-30VDC @ 0.5 Amps max
- IEEE 802.3af compliant
- 2 kV isolation between power supply and serial ground

No power supply ships with this product.

REGULATORY APPROVALS

- FCC Part 15, Class A
- CE
- Class 1, Div 2 – UL 1604
- ICES-003, A
- EN55022, A
- EN 6100-6-2 + EN55024
- UL 1950
- CSA 22.2 No. 950
- EN 60950
- AS3548

OPERATING SYSTEMS



RealPort drivers for COM/TTY support

- AIX
- Compaq Tru64
- HP-UX
- Linux
- Windows® XP
- Windows 2000
- Windows NT®
- Windows 98/ME
- Windows Server™ 2003
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)



DIMENSIONS

- Length: 4.7 in. (12.0 cm)
- Depth: 4.0 in (10.1 cm)
- Width: 0.9 in. (2.3 cm)
- Weight: 2.5 oz (64.0 g)

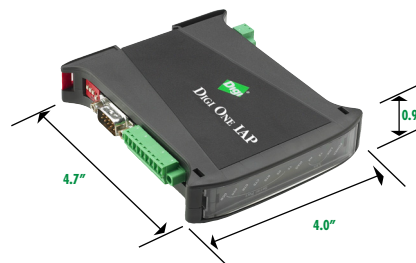

MODEL.....PART NUMBERS

Model	North America	International
Digi One IAP	70001777	70001777
48VDC to 12VDC Power Supply	76000696	76000696

Slave	MB/RTU	MB Serial	MB/TCP	DF1	A-B Eth	ENet/IP*	ASCII
Master							
MB Serial	–	Yes	Yes	Yes	Yes	Yes	Yes
MB/TCP	Yes	Yes	–	Yes	Yes	Yes	Yes
DF1	Yes	Yes	Yes	–	Yes	Yes	Yes
A-B Eth	Yes	Yes	Yes	Yes	–	Yes	Yes
ENet/IP	Yes	Yes	Yes	Yes	Yes	–	Yes
ASCII	No	No	No	No	No	No	–

* PCCC encapsulated under CIP only for EtherNet/IP

DIGI SERVICE AND SUPPORT

You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International
11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
www.digi.com

Digi International France
31 rue des Poissonniers
92 200 Neuilly sur Seine
PH +33-1-55-61-98-98
FX +33-1-55-61-98-99

Digi International KK
NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH +81-3-5428-0261
FX +81-3-5428-0262

Digi International (HK) Limited
Suite 1703-05, 17/F,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

www.digi.com

email:
info@digi.com



91001155
D1/206

© 1999-2006 Digi International Inc. Digi, Digi International, the Digi logo, the Making Device Networking Easy logo, Digi One and RealPort are trademarks or registered trademarks of Digi International, Inc. in the United States and other countries worldwide. Microsoft, Windows and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.