

PWR-242

PWR-243

PWR-244

DIN-rail Power Supply

Panel Mount Power Supply

Panel Mount Power Supply



PWR-242



PWR-243



PWR-244



Specifications

Input

- Input Current: 1.2 A max.
- Inrush Current (cold): 20 A/110 V_{AC}
40 A/220 V_{AC}
- Input Frequency: 47 ~ 63 Hz
- Input Voltage: 90 ~ 264 V_{AC} wide input range
- Short Protection

Output

- Output Current: 2.1 A max.
- Output Voltage: +24 V_{DC} ±10%
- Overload Protection

General

- Certifications: CE, UL
- Connectors: Screw-terminal
- Dimensions (LxWxH): 181 x 113 x 60 mm
(7.01" x 4.43" x 2.35")
- Enclosure: Sheet metal
- MTBF: 85,000 hrs
- Operating Temperature: 0 ~ 50° C
(32 ~ 122° F)

Ordering Information

- PWR-242: DIN-rail Power Supply

Specifications

Input

- Input Current: 1.4 A max.
- Inrush Current (cold): 20 A/110 V_{AC}
40 A/220 V_{AC}
- Input Frequency: 47 ~ 63 Hz
- Input Voltage: 85 ~ 132 V_{AC} or
170 ~ 264 V_{AC} (switchable)
- Short Protection

Output

- Output Current: 3 A max.
- Output Voltage: +24 V_{DC} ±10%
- Overload Protection

General

- Certifications: CE, UL
- Connectors: Screw-terminal
- Dimensions (LxWxH): 128 x 97 x 40 mm
(5" x 3.8" x 1.6")
- Enclosure: Sheet metal
- MTBF: 78,000 hrs
- Operating Temperature: 0 ~ 50° C
(32 ~ 122° F)

Ordering Information

- PWR-243: Panel Mount Power Supply

Specifications

Input

- Input Current: 1.4 A max.
- Inrush Current (cold): 25 A/110 V_{AC}
50 A/220 V_{AC}
- Input Frequency: 47 ~ 63 Hz
- Input Voltage: 100~240 V_{AC}
- Short Protection

Output

- Output Current: 4.2 A max.
- Output Voltage: +24 V_{DC} ±10%
- Overload Protection


General

- Certifications: CE, UL
- Connectors: Screw-terminal
- Dimensions (LxWxH): 198 x 99 x 35 mm
(7.80" x 3.90" x 1.38")
- Enclosure: Sheet metal
- MTBF: 70,000 hrs
- Operating Temperature: 0 ~ 50° C
(32 ~ 122° F)

Ordering Information


- PWR-244: Panel Mount Power Supply

Dimensions




Unit: mm

Dimensions

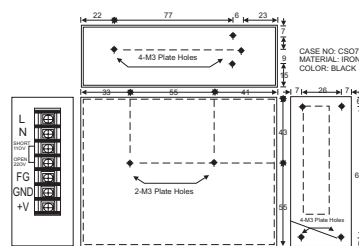

Unit: mm

Dimensions



Unit: mm