

PC311E

PC module with 5th Gen Intel® Broadwell Core™ i5/i3 or Celeron® Processor, 1x PCIe x4 Expansion

FEATURES

- Intel® Core™ Processor i5-5350U, up to 2.9GHz / i3-5010U, 2.1GHz or Celeron® 3765U, 1.9GHz
- 1x 204-pin DDR3L SODIMM. Max up to 8GB
- 1x 2.5" SATA HDD bay support RAID 0,1, 5, 2x mSATA, 2x SIM socket
- 2x Full-size mini PCIe for communication or expansion modules
- 1x PCIe x4
- 1x Universal I/O Bracket (By mini PCIe interface)
- 2x LAN, 1x VGA, 1x DisplayPort
- 4x RS-232/422/485, 3x USB 3.0, 1x USB 2.0, Audio, DIO
- 9 to 48VDC wide range power input
- -40°C to 60°C extended operating temperature



SPECIFICATIONS

SYSTEM

Processor	- 5 th Gen Intel® Core™ i5-5350U Processor, Dual Core, 3MB Cache, up to 2.9 GHz - 5 th Gen Intel® Core™ i3-5010U Processor, Dual Core, 3MB Cache, 2.1 GHz - 5 th Gen Intel® Celeron® Processor 3765U, Dual Core, 2MB Cache, 1.9 GHz
System Chipset	SoC integrated

LAN Chipset	GbE1: Intel® I210-AT (Support Wake-on-LAN and PXE) GbE2: Intel® I218-LM (Support Wake-on-LAN and PXE)
-------------	--

Audio Codec	Realtek ALC888S
-------------	-----------------

System Memory	1x 204-Pin DDR3L 1333/1600MHz SODIMM. Max. up to 8GB
---------------	--

BIOS	AMI 128Mbit SPI BIOS
------	----------------------

Watchdog	Software Programmable Supports 1~255 sec. System Reset
----------	--

DISPLAY

VGA	1x VGA (or 1x DVI-D by Order)
-----	-------------------------------

DisplayPort	1x DisplayPort
-------------	----------------

LVDS	1x Dual Channel 24 bit LVDS
------	-----------------------------

Multiple Display	Triple Display
------------------	----------------

STORAGE

SSD/HDD	1x Removable 2.5" SATA HDD Bay Support RAID 0, 1, 5
---------	---

mSATA	2x mSATA (Shared by 2x Mini PCIe)
-------	-----------------------------------

SIM Socket	2x External SIM socket
------------	------------------------

EXPANSION

Mini PCI Express	2x Full-size Mini PCIe
------------------	------------------------

PCI Express	1x PCIe x4
-------------	------------

I/O

COM	2x RS-232/422/485 2x RS-232/422/485 (internal)
-----	---

USB	3x USB 3.0, 1x USB 2.0
-----	------------------------

LAN	2x RJ45
Audio	1x Mic-in, 1x Speaker-out
DIO	4 in / 4 out (Isolated)
Universal I/O Bracket	1x Universal I/O Bracket (By mini PCIe interface)
Others	3x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off

OPERATING SYSTEM

Windows	Windows 10, Windows 8.1, WES8.1, Windows 7, WES7
---------	--

Linux	Linux kernel 3.X
-------	------------------

POWER

Power Mode	AT, ATX
------------	---------

Power Supply Voltage	9~48VDC
----------------------	---------

Power Ignition Sensing	Power Ignition Management
------------------------	---------------------------

Power Connector	3-pin Terminal Block
-----------------	----------------------

Power Adaptor	Optional AC/DC 12V/5A, 60W
---------------	----------------------------

Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) Reverse Protection
------------------	--

ENVIRONMENT

Operating Temp.	-40°C to 60°C
-----------------	---------------

Storage Temp.	-40°C to 85°C
---------------	---------------

Relative Humidity	10%~80% (non-condensing)
-------------------	--------------------------

Vibration	With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
-----------	--

Shock	With SSD: 50G, half sine, 11ms
-------	--------------------------------

Standards / Certification	CE, FCC Class A
---------------------------	-----------------

PHYSICAL

Construction	Extruded Aluminum with Heavy Duty Metal
--------------	---


Dimension	253 (W) x 225 (D) x 59 (H)mm
-----------	------------------------------

Weight	2.21 kg
--------	---------


Mounting	VESA Mounting Holes 75 x 75mm, 100 x 100mm
----------	---

EXTERNAL I/O MECHANICAL LAYOUT

Front I/O

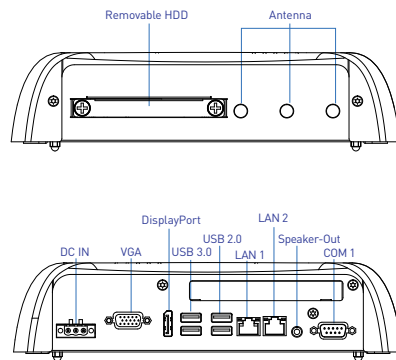

Left I/O

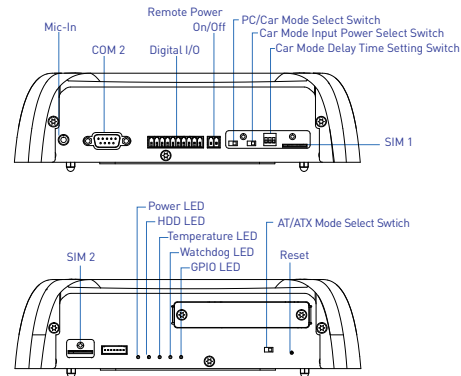


Rear I/O

Right I/O

DIMENSION

Unit: mm

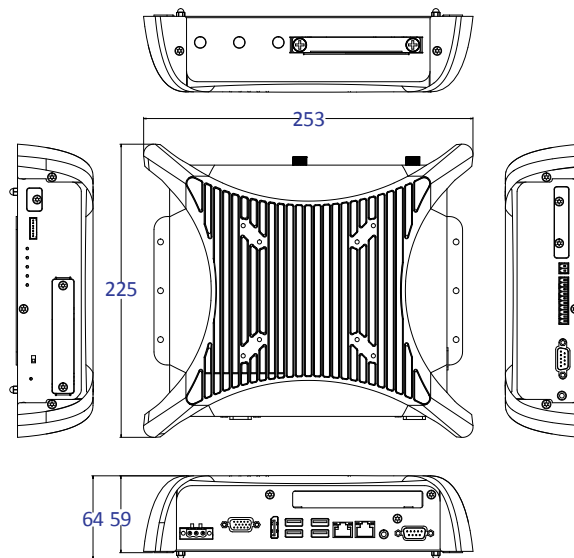

AVAILABLE MODELS

MODEL NO.	DESCRIPTION
PC311E-5350U	PC Module for Industrial Display System with Intel i5-5350U Processor, 1x PCIe x4 Expansion
PC311E-5010U	PC Module for Industrial Display System with Intel i3-5010U Processor, 1x PCIe x4 Expansion
PC311E-3765U	PC Module for Industrial Display System with Intel Celeron 3765U Processor, 1x PCIe x4 Expansion

OPTIONAL ACCESSORIES

MODEL NO.	DESCRIPTION
1-E09A06007	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch
SFICBL022	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

PACKING LIST

- 1x PC300 Series PC Module
- 1x Utility DVD Driver
- 1x Screw Pack

APPLICABLE DISPLAY MODULES

- 10": VIO-110, VIO-110-11
- 12": VIO-112, VIO-212, VIO-212-11
- 15": VIO-115, VIO-215
- 15.6": VIO-W115, VIO-W215
- 17": VIO-117, VIO-217
- 19": VIO-119, VIO-219
- 21.5": VIO-W121, VIO-W221