



1. KST RNBS 22-6 or equivalent terminals for 6 AWG Wire
2. Inside diameter 6.4 mm & Outside diameter 12.2mm ring for M6 screw





VIEW A

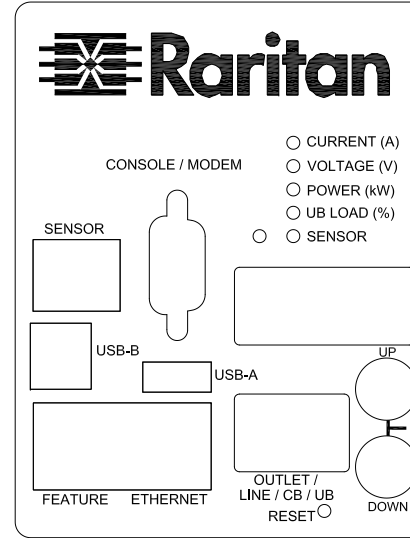

VIEW B

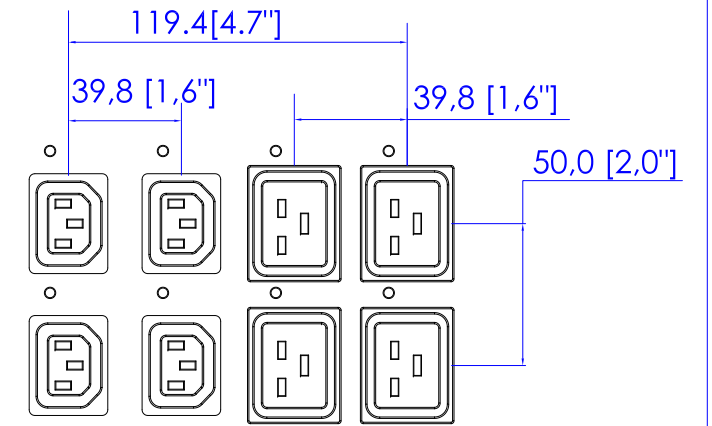

VIEW C

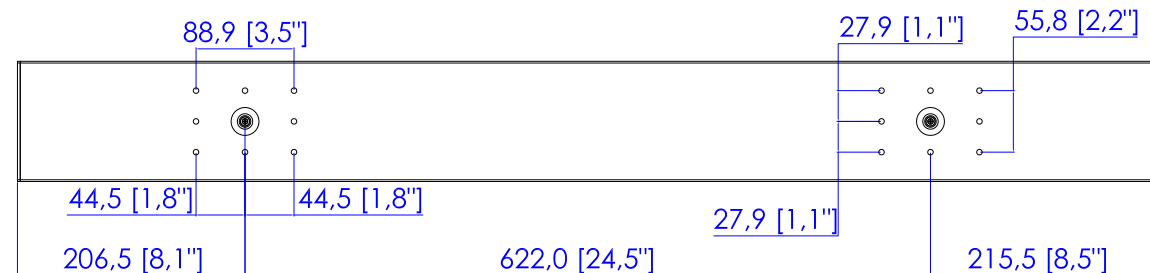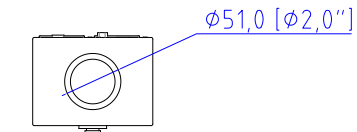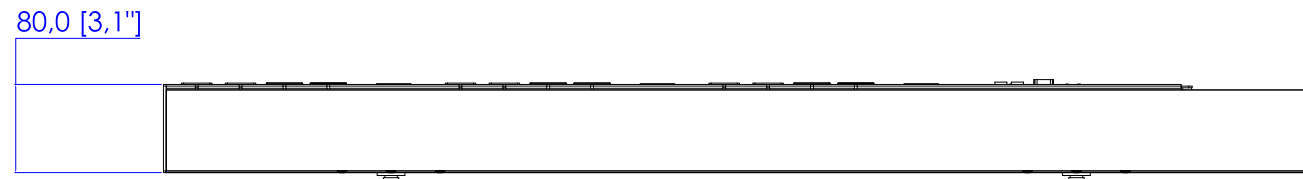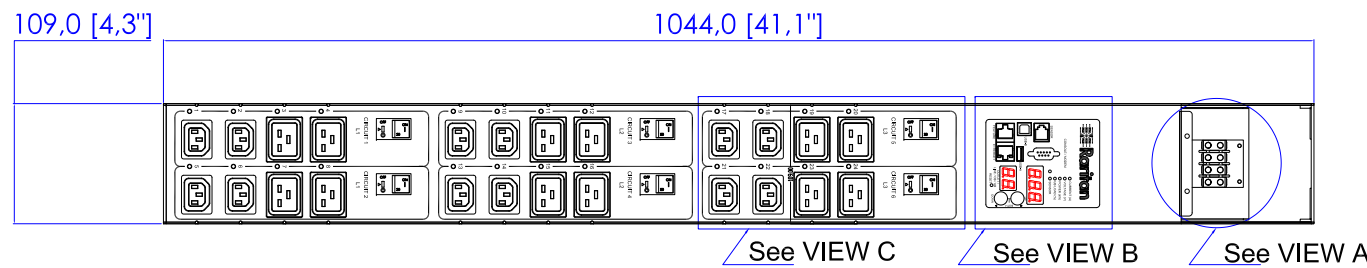

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].



DRAWN :	EVA LIN	May 11, 2012
ENGINEER:	Kenny_C	May 11, 2012
APPROVED:	Tom_H	May 11, 2012



PROJECTION
THIRD ANGLE
DO NOT SCALE DRAWING
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:
iPDU Zero U,
Three phase 40A / 380V-415V
Plug Type: 40A Terminal 3PY (UL) ,
Outlet Type: (12)IEC320 C13 , (12)IEC320 C19

DWG NO.
MPX2-4971YU-N1 & MPX2-5971YU-N1

REV.
A