




NEMA L22-30P














VIEW A VIEW B

Rear



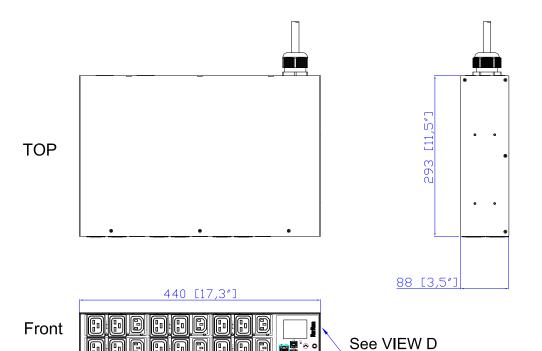







VIEW C

VIEW D

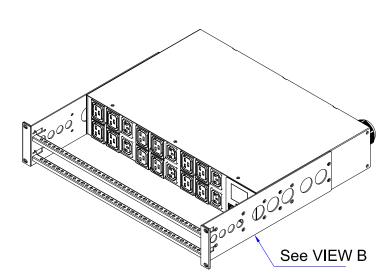



- NOTES:

 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.

 2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLITERS INKHES].

 4. MOUNTING BUTTON IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLESS MOUNT FOR 3RD PARTY ENCLOSURE.
 BUTTON IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.

 5. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.

 6. LENGTH OF THE CORD IS 30000M-/-70MM

 7. DIMENSION TOLERANCE: LENGTH /-3MM, WIDTH +/-IMM, DEPTH +/-0.5MM

 8. REFER TO THE TABLE FOR DETAIL CORD LENGTH DEFINITION

A brand of Li legiand

Drawing Maker:	Eva Lin	Sep. 27, 2017
Design Engineer:	Kenny_C	Sep. 27, 2017
Annrover:	Tom H	Sep. 27, 2017



PROJECTION THIRD ANGLE

DO NOT SCALE DRAWING SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, Inc. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, Inc. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE: iPDU Two U

Three Phase, 24A/360-415V Plug Type: NEMA L22-30P Outlet Type: C13 (6), C19 (12)

MPX3-4913R M5 & MPX3-5913R M5

PX3-4913R & PX3-5913R PX3-4913R-M5 & PX3-5913R-M5 2A

REV.