

IOLAN SDG W Serial Device Servers

 perle.com/products/iolan-sdg-wireless-device-server.shtml

Wireless LAN Serial to Ethernet

- High performance WLAN (Wi-Fi ®) : Dual band radio supporting IEEE 802.11 a,b,g,n
- Wireless speeds up to 150Mbps
- 1, 2 or 4 software selectable RS232/422/485 serial port interfaces
- High-Speed Gigabit Ethernet (10/100/1000 Base-T)
- Advanced security features for data encryption, user authentication and event management
- Wireless Infrastructure and peer to peer connectivity modes



For secure, High-Speed serial to Ethernet connectivity over wireless LAN applications, the IOLAN SDG W Device Server is the most advanced compact product available on the market today. Delivering high performance in a compact size, an IOLAN SDG W offers a support for a broad range of high performance Wireless LAN technology, extensive security, flexibility and next generation IPv6 technology making it ideal for applications that require remote serial device/console management, data capture or monitoring.

Why IOLAN SDG Wireless Device Servers are the preferred choice:

- Broad range support of Wireless LAN Technology : IEEE 802.11 a,b,g,n @ 2.4Ghz/5Ghz
- Fast wireless – speeds up to 150Mbps
- High-Speed Gigabit Ethernet 1000base-T interface including support for 100base-TX and 10base-T
- As a wireless client proxy, provides wireless connectivity to central access points for serial and ethernet devices
- Can provide a direct serial to serial peer connection over wireless
- Software Access Point (SoftAP) for up to 6 wireless clients.
- Fast Wireless Roaming capability is ideal for mobile applications where the IOLAN can transparently roam between APs (Access Points) that share the same ESS (Extended Service Set)
- Redundant dual power inputs (barrel and terminal block)
- TrueSerial® packet technology delivers the most authentic serial connections across Ethernet for serial protocol integrity
- Indicators for network and serial interfaces for easy troubleshooting
- Plug & Play installation utility eliminates configuration hassles for all IOLAN's on your IP network
- TruePort – Perle's com/tty redirector for serial based applications operates on Windows, Vista, Linux, Solaris, SCO and Unix
- Next Generation IP support (IPv6) for investment protection and network compatibility
- Compact and protective solid steel enclosure for tabletop, wall mount or DIN rail mounting
- Java-free browser access to remote serial console ports via Telnet and SSH
- Ping watchdog probes enable customers to power cycle equipment with attached Perle RPS power switches in the event of an unresponsive networking gear

Secure Serial to Ethernet Connectivity

The **IOLAN SDG Wireless Device Server** enables administrators to securely access remote serial console ports on equipment such as PBX, servers, routers, network storage equipment and security appliances through an IP network. Sensitive data such as credit card holder information is protected through standard encryption tools such as Secure Shell (SSH) and Secure Sockets Layer (SSL). Access by authorized users is assured via authentication schemes such as RADIUS, TACACS+, LDAP, Kerberos, NIS and RSA Security's SecurID tokens.

By using encryption technologies, an IOLAN can protect sensitive and confidential data from a serial device such as a credit card reader before being sent across a corporate Intranet or public Internet. For compatibility with peer encryption devices, all of the major encryption ciphers such as AES, 3DES, RC4, RC2 and CAST128 are fully supported.

Recognized as the most secure method for communicating to remote private networks over the Internet, the IPSec standard provides robust authentication and encryption of IP packets at the network layer of the OSI model. As a standard it is ideal for multi-vendor interoperation within a network providing flexibility and the ability to match the right solution for a particular application.

IOLAN Plug-ins

By choosing a Perle IOLAN Device Server you can rest assured that virtually any device with a serial COM port will operate in conjunction with your desired application exactly as it did when you had it directly connected. In the unlikely event that the Perle IOLAN Device Server does not enable this out of the box, *Perle will make it work.*

Perle IOLAN Device Servers utilize customer installable "Device Plug-ins" to successfully network devices where other solutions have failed. Request a free engineering consultation now.

Advanced IP Technology

With support for Next Generation IP (IPv6) the **IOLAN Serial to Ethernet Device Server** range provides organizations with investment protection to meet this rapidly growing standard.

Demand for IPv6, which is compatible with IPv4 addressing schemes, is driven by the need for more IP address. With the implementation and rollout of advanced cellular networks, a robust method is needed to handle the huge influx of new IP addressable devices on the Internet. In fact, the US Department of Defense has mandated that all equipment purchased be IPv6 compatible. In addition, all major Operating Systems such as Windows, Linux, Unix and Solaris, as well as routers, have built-in support for IPv6.

It is therefore important for end users and integrators to select networking equipment that incorporates the IPv6 standard. The IOLAN line with support for IPv6 already built in, is the best choice in serial to Ethernet technology.

Flexible and Reliable Serial to Ethernet Connections

An **IOLAN SDG W Device Server** is ideal for wirelessly connecting serial based COM port, UDP or TCP socket based applications to remote devices. Perle’s TruePort re-director provides fixed TTY or COM ports to serial based applications enabling communication with remote devices connected to Perle IOLAN's either in encrypted or clear text modes. You can also tunnel serial data between devices across an IP network.

Perle's Device Management software provides better centralized control of multiple units resulting in maximum uptime for your remote equipment.

All IOLAN SDG W models have added protection against electrostatic discharges and power surges with robust 15Kv ESD protection circuitry enabling organizations to utilize this solution in the field with confidence.

Lifetime Warranty

All **Perle IOLAN SDG Serial to Ethernet Device Servers** are backed by the best service and support in the industry including Perle's unique lifetime warranty. Since 1976 Perle has been providing its customers with networking products that have the highest levels of performance, flexibility and quality.

Wi-Fi is a registered trademark of Wi-Fi Alliance Corporation

Topology Support
Serial to WLAN
Serial to ethernet
Ethernet to WLAN
Infrastructure (to Access Point) and secure peer to peer using SoftAP (vs legacy “Ad-Hoc”)
Serial Port Access
Connect directly using Telnet / SSH by port and IP address
Connect with EasyPort menu by Telnet / SSH
Use an internet browser to access with HTTP or secure HTTPS via EasyPort Web menu
Java-free browser access to remote serial console ports via Telnet and SSH
Ports can be assigned a specific IP address (aliasing)
Multisession capability enables multiple users to access ports simultaneously on 2 and 4 port models
Multihost access enables multiple hosts/servers to share serial ports

Accessibility

In-band (Ethernet) and out-of-band (dial-up modem) support

Dynamic DNS enables users to find a console server from anywhere on the Internet

Domain name control through DHCP option 81

IPV6 and IPV4 addressing support

Availability

Primary/Backup host functionality enables automatic connections to alternate host(s)

Security

SSH v1 and v2

PCI DSS Compliance: TLS v1.2, TLS v1.1, TLS v1.0, SSL v3.0, SSL v2.0

SSL Server and SSL client mode capability

SSL Peer authentication

IPSec VPN : NAT Traversal, ESP authentication protocol

SSH ciphers: AES-CTR, AES-GCM and ChaCha20-poly1305

SSL encryption: AES-GCM, key exchange ECDH-ECDSA, HMAC SHA256, SHA384

Encryption: AES (256/192/128), 3DES, DES, Blowfish, CAST128, ARCFOUR(RC4), ARCTWO(RC2)

Hashing Algorithms: MD5, SHA-1, RIPEMD160, SHA1-96, and MD5-96

Key exchange: RSA, EDH-RSA, EDH-DSS, ADH

X.509 Certificate verification: RSA, DSA

Certificate authority (CA) list

Wireless LAN : WPA-PSK, WPA2-PSK & Enterprise (EAP, PEAP, LEAP), WEP, IEEE 802.11i, IEEE 802.1x supplicant

Local database

RADIUS Authentication, Authorization and Accounting

TACACS+ Authentication, Authorization and Accounting

LDAP, NIS, Kerberos Authentication

RSA SecureID-agent or via RADIUS Authentication

SNMP v3 Authentication and Encryption support

IP Address filtering

Disable unused daemons

Active Directory via LDAP

Terminal Server

Telnet

SSH v1 and v2

Rlogin

Auto session login

LPD, RCP printer

MOTD - Message of the day

Serial machine to Ethernet

Tunnel raw serial data across Ethernet - clear or encrypted

Raw serial data over TCP/IP

Raw serial data over UDP

Serial data control of packetized data

Share
serial ports with multiple hosts/servers

Virtual modem simulates a modem connection - assign IP address by AT
phone number

Virtual modem data can be sent over the Ethernet link with or without
SSL encryption

TruePort com/tty redirector for serial based applications on Windows, Linux, Solaris, SCO, HP UX,
NCR UNIX and AIX. For a complete list of all the latest drivers [click here](#)

TrueSerial packet technology
provides the most authentic serial connections across Ethernet ensuring
serial protocol integrity

RFC 2217 standard for transport of serial data and RS232 control signals

Customizable or fixed serial baud rates

Plug-ins allow customer or Perle provided plug-ins for special applications

Software Development Kit (SDK) available

Serial encapsulation of industrial protocols such as ModBus, DNP3 and IEC-870-5-101

ModBus TCP gateway enables serial Modbus ASCII/RTU device connection to ModBus TCP

Data logging will store serial data received when no active TCP session and forward to network
peer once session re-established - 32K bytes circular per port

Console Management

Sun / Oracle Solaris Break Safe

Local port buffer viewing - 256K bytes per port
External port buffering via NFS, encrypted NFS and Syslog
Event notification
Manage AC power of external equipment using Perle RPS power management products
Clustering - central console server enables access ports across multiple console servers
Windows Server 2003/2008 EMS - SAC support GUI access to text-based Special Administrative Console
Ping watchdog probes enable customers to power cycle equipment with attached Perle RPS power switches in the event of an unresponsive networking gear

Remote Access

Dial, direct serial	PPP, PAP/CHAP, SLIP
	HTTP tunneling enables firewall-safe access to remote serial devices across the internet
Automatic DNS Update	Utilize DHCP Opt 81 to set IOLAN domain name for easy name management and with Dynamic DNS support , users on the Internet can access the device server by name without having to know its IP address. See Automatic DNS update support for details
IPSEC VPN client/servers	Microsoft L2TP/IPSEC VPN client (native to Windows XP)
	Microsoft IPSEC VPN Client (native to Windows Vista)
	Cisco routers with IPSEC VPN feature set
	Perle IOLAN SDS/STS and SCS models

OA&M (Operations, Administration and Management)

WiFi Protected Setup (WPS)
SNMP V3 - read and write, Perle MIB
Syslog
Perle Device Manager - Windows based utility for large scale deployments
Configurable default configuration
Installation Wizard
Set a Personalized Factory Default for your IOLANs

Protocols

IPv6, IPv4, TCP/IP, Reverse SSH, SSH, SSL, IPsec/IPv4, IPsec/IPv6, L2TP/IPsec, CIDR, RIPv2/MD5, ARP, RARP, UDP, UDP Multicast, ICMP, BOOTP, DHCP, TFTP, SFTP, SNMP, Telnet, raw, reverse Telnet, LPD, RCP, DNS, Dynamic DNS, WINS, HTTP, HTTPS, SMTP, SNMPV3, PPP, PAP/CHAP, SLIP, CSLIP, RFC2217, MSCHAP

Hardware Specifications - IOLAN SDG W Wireless LAN Serial Device Servers

IOLAN SDG1/2 W		IOLAN SDG4 W
Processor	600Mhz ARM Processor	
Memory		
RAM MB	512M	
Flash MB	4G	
Interface Ports		
Number of Serial Ports	1 or 2 (DB9M)	4 (RJ45)
Serial Port Interface	Software selectable EIA232/422/485	
Back of product	<div></div> <div></div>	
Sun / Solaris	Sun / Oracle 'Solaris' Safe - no "break signal" sent during power cycle causing costly server re-boots or downtime	
Serial Port Speeds	300bps to 230Kbps with customizable baud rate support	
Data Bits	5,6,7,8, 9-bit protocol support	
Parity	Odd, Even, Mark, Space, None	
Flow Control	Hardware, Software, Both, None	
Serial Port Protection	15Kv Electrostatic Discharge Protection (ESD)	
Local Console Port	RS232 on Serial Port	
Ethernet Network	Autosensing 1000-base-T / 100-base TX / 10-base T Auto-MDIX	
	Software selectable Ethernet speed 1000/100/10	
	Software selectable Half/Full/Auto duplex	
Ethernet Isolation	1.5Kv Magnetic Isolation	
Integrated Wireless Access		

Wireless LAN standards	IEEE 802.11a
	IEEE 802.11b
	IEEE 802.11g
	IEEE 802.11n
	IEEE 802.11i
Wireless Topology	Infrastructure (AP) and Peer to Peer- (<u>SoftAP</u>) modes
Wireless Radio	Dual-Band Radio ; 2.4GHz and 5GHz 20, 40Mhz SISO 2.4-GHz
Maximal Ratio Combining (MRC), Rx Diversity	2.4 GHz MRC support for up to 1.4 Extended Range and 5 GHz Diversity Capable
Wireless Data Rates	802.11n: 15, 30, 45, 60, 90, 120, 135, 150 Mbps (40Mhz channel @ 400ns Short GI)
	802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps
Operational Frequency Range (MHz)	2412 to 2484 MHz
	4910 to 5825 MHz
Modulation	DSSS, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Wireless Receiver Sensitivity in dBm (2.4Ghz SISO)	<u>802.11b/g (20 MHz channel)</u>
	1 Mbps: -95.0
	2 Mbps: -92.0
	5.5 Mbps: -89.2
	6 Mbps: -91.0
	9 Mbps: -89.0
	11 Mbps: -86.3
	12 Mbps: -88.0
	18 Mbps: -85.5
	24 Mbps: -82.5
	36 Mbps: -79.0
	48 Mbps: -74.0
	54 Mbps: -72.7
	<u>802.11n (20 MHz channel) @ 400ns GI</u>
	7.2 Mbps (MCS0): -89.3

14.4 Mbps (MCS1): -86.5

21.7 Mbps (MCS2): -84.5

28.9 Mbps (MCS3): -81.5

43.3 Mbps (MCS4): -78.0

57.8 Mbps (MCS5): -73.5

65.0 Mbps (MCS6): - 71.5

72.2 Mbps (MCS7): -70.0

802.11n (40 MHz channel) @ 400ns GI

15.0 Mbps (MCS0): -89.3

30.0 Mbps (MCS1): -86.5

45.0 Mbps (MCS2): -84.5

60.0 Mbps (MCS3): -81.5

90.0 Mbps (MCS4): -78.0

120.0 Mbps (MCS5): -73.5

135.0 Mbps (MCS6): - 71.5

150.0 Mbps (MCS7): -70.0

Wireless (20 MHz channel)

Transmit Power
in dBm

1 Mbps: 16.0

(2.4Ghz SISO
)

2 Mbps: 16.0

5.5 Mbps: 16.0

6 Mbps: 16.5

9 Mbps: 16.5

11 Mbps: 16.0

12 Mbps: 16.5

18 Mbps: 16.5

24 Mbps: 16.5

36 Mbps: 15.2

48 Mbps: 14.3

54 Mbps: 13.5

MCS0 : 16.0

MCS1 : 16.0

MCS2 : 16.0

MCS3 : 16.0

MCS4 : 15.2

MCS5 : 14.3

MCS6 : 13.5

MCS7 : 12.6

(40 MHz channel)

MCS0 : 14.0

MCS7 : 11.8

Wireless Receiver Sensitivity in dBm	<u>802.11a</u>
(5Ghz SISO)	6 Mbps: -92.5
	9 Mbps: -90.5
	12 Mbps: -90.0
	18 Mbps: -87.5
	24 Mbps: -84.5
	36 Mbps: -81.0
	48 Mbps: -76.5
	54 Mbps: -74.6
	<u>802.11n (20MHz channel) @ 400ns GI</u>
	7.2 Mbps (MCS0): -91.4
	14.4 Mbps (MCS1): -88.0
	21.7 Mbps (MCS2): -86.0
	28.9 Mbps (MCS3): -83.0
	43.3 Mbps (MCS4): -79.8
	57.8 Mbps (MCS5): -75.5
	65.0 Mbps (MCS6): - 74.0
	72.2 Mbps (MCS7): -72.4
	<u>802.11n (40MHz channel) @ 400ns GI</u>
	15.0 Mbps (MCS0): -88.5
	150.0 Mbps (MCS7): -69.3

Wireless Transmit Power in dBm	<u>802.11a</u> 6 Mbps: 18.0 (5Ghz SISO) 9 Mbps: 18.0 12 Mbps: 18.0 18 Mbps: 18.0 24 Mbps: 17.4 36 Mbps: 16.5 48 Mbps: 15.8 54 Mbps: 14.5 <u>802.11n (HT20) @ 400ns GI</u> 7.2 Mbps (MCS0): 18.0 14.4 Mbps (MCS1): 18.0 21.7 Mbps (MCS2): 18.0 28.9 Mbps (MCS3): 18.0 43.3 Mbps (MCS4): 16.5 57.8 Mbps (MCS5): 15.8 65.0 Mbps (MCS6): 14.5 72.2 Mbps (MCS7): 12.0 <u>802.11n (HT40) @ 400ns GI</u> 15.0 Mbps (MCS0): 16.5 150.0 Mbps (MCS7): 12.0
Short Guard Interval (SGI)	800ns and 400ns (Short Guard Interval)
Wireless Antenna	Dual-band 2.4/5.0 GHz, Omni-directional, Dipole antenna, 50 Ohm, 2 dBi, black with RP-SMA / RSMA finger tighten connector. Same antenna can be used as Main and/or Diversity for increased wireless performance, signal reliability, and extended range.
Wireless Security	WEP, WPA-PSK, WPA2-PSK & Enterprise (EAP, PEAP, LEAP), 802.11i (includes hardware-accelerated Advanced Encryption Standard [AES]), 802.1x supplicant
Fast Wireless Roaming	Ideal for mobile applications , the IOLAN can transparently roam between APs (Access Points) that share the same ESS (Extended Service Set)
WiFi Protected Setup (WPS V2)	A plug and play set up feature where the IOLAN can easily connect to a WPS capable central access point or a SoftAP compliant device supporting WPS

Power		
Power Supply	120 V / 230V AC to 12vDC Wall Power Adaptor included. (Barrel connector, commercial-grade temperature – 0 to 60C)	
2 x Power Supply Selection	Use external power 9-30v DC on standard 5.5mm x 9.5mm x 2.1mm barrel socket or 2-pin terminal block	
Nominal Input Voltage	12/24v DC	
Input Voltage Range	9-30v DC	
Typical Power Consumption	1 port : 3.96	4.44
@ 24v DC (Watts)	2 port: 4.23	
Indicators		
LEDs	Power/Ready	
	Network Link	
	Network Link activity	
	Serial: Transmit and Receive data per port	
	Wireless Link	
	Wireless Strength	
Environmental Specifications		
Heat Output	1 port: 13.5	15.1
(BTU/HR)	2 port: 14.4	
MTBF (Hours)*	1 port : 222,675	170,530
	2 port : 206,430	
Operating Temperature	-40° C to 75° C (-40 F to 167° F)	
Storage Temperature	-40 C to 85 C (-40 F to 185 F)	
Humidity	5 to 95% (non-condensing) for both storage and operation.	
Case	SECC Zinc plated sheet metal (1 mm)	
Ingress Protection Rating	IP40	
Mounting	Wall or Panel mounting, DIN Rail mounting kit optional	

Product Weight and Dimensions		
Weight	0.25 kg (0.55 lbs)	0.4 kg (0.88 lbs)
Dimensions	90 x 76 x 24 mm (3.5 x 3.0 x 0.9 in)	110 x 111 x 24 mm (4.3 x 4.4 x 0.9 in)
Packaging		
Shipping Dimensions	26 x 17 x7 cm (10.2 x 6.7 x 2.8 in)	26 x 17 x7 cm (10.2 x 6.7 x 2.8 in)
Shipping weight	0.55 kg (1.21 lbs)	0.71 kg (1.6 lbs)
Regulatory Approvals		
Emissions	FCC Part 15, Subpart B, Class B	
	CFR47:2003, Chapter 1, Part 15 Subpart B,(USA) Class B	
	ICES-003, Issue 4, February 2004 (Canada)	
	EN55022:1998 + A1:2000 + A2:2003 Class A	
	EN61000-3-2 : 1995, Limits for Harmonic Current Emissions	
	EN61000-3-3 : 1995, Limits of Voltage Fluctuations and Flicker	
Immunity	EN55024:1998 + A1:2001 + A2:2003	
	EN61000-4-2: Electrostatic Discharge	
	EN61000-4-3: RF Electromagnetic Field Modulated	
	EN61000-4-4: Fast Transients	
	EN61000-4-5: Surge	
	EN61000-4-6: RF Continuous Conducted	
	EN61000-4-8: Power-Frequency Magnetic Field	
	EN61000-4-11: Voltage Dips and Voltage Interruptions	
Safety	IEC 60950-1 : 2005 (2nd Edition) + A1 : 2009 and	
	EN 60950-1 : 2006 + A11 : 2009	
	CAN/CSA-C22.2 No. 60950-1-03 and ANSI/UL 60950-1,	
	First Edition April 1st 2003 (Recognized Component)	
Wireless Regulatory Domain	FCC/ICES	
	ETSI	
	TELEC	
Users are responsible for verifying approval for use in their individual countries.		

Radio Approvals	FCC Part 15.247 Subpart C (2.4 Ghz)
	FCC Part 15.407 Subpart E (5 Ghz)
	RSS-210 (Canada), RSS-Gen Issue 2 (Canada), ICES-003 Issue 4
	ETSI EN 301 489-1 (V1.9.2)
	ETSI EN 301 489-17 (V2.2.1)
	ETSI EN 300 328 (V1.8.1)
	ETSI EN 301 893 (V1.7.1)
Frequency Bands	<u>FCC / ICES</u>
	2.412 to 2.462 GHz; 11 channels
	5.180 to 5.320 GHz; 8 channels
	5.500 to 5.700 GHz, 8 channels (excluding 5.600 to 5.640 GHz)
	5.745 to 5.825 GHz; 5 channels
	<u>ETSI</u>
	2.412 to 2.472 GHz; 13 channels
	5.180 to 5.320 GHz; 8 channels
	5.500 to 5.700 GHz; 8 channels (excluding 5.600 to 5.640 GHz)
	<u>MIC (formally TELECOM)</u>
	2.412 to 2.472 GHz; 13 channels
	4.920 to 4.980 GHz; 4 channels
	5.030 to 5.091 GHz; 3 channels
	5.180 to 5.240 GHz; 8 channels
	5.500 to 5.700 GHz; 11 channels
Other	Reach, RoHS and WEEE Compliant
	CCATS - G168387
	ECCN - 5A992
	HTSUS Number: 8471.80.1000
	Perle Limited Lifetime Warranty

Serial Connector Pinout

IOLAN DB9M Socket	Direction	RS232	RS485 Full Duplex	RS485 Half Duplex	RS422
1	←	DCD	-	-	-
2	←	RxD	RxD+	-	RxD+
3	→	TxD	TxD-	DATA-	TxD-
4	→	DTR	-	-	-
5	—	GND	GND	GND	GND
6	←	DSR	-	-	-
7	—	RTS	TxD+	DATA+	TxD+
8	←	CTS	RxD-	-	RxD-
9	—	-	-	-	-

IOLAN RJ45 Socket	Direction	RS232	RS485 Full Duplex	RS485 Half Duplex	RS422
1	←	DCD	-	-	-
2	→	RTS	TxD+	DATA+	TxD+
3	←	DSR	-	-	-
4	→	TxD	TxD-	DATA-	TxD-
5	←	RxD	RxD+	-	RxD+
6	—	GND	GND	GND	GND
7	←	CTS	RxD-	-	RxD-
8	→	DTR	-	-	-


Optional Perle adapters for use with straight thru CAT5 cabling

*Calculation model based on MIL-HDBK-217-FN2 @ 30 °C

Seamless Wireless Roaming

Serial devices can roam


IOLAN SDS W units installed on mobile devices, such as fork lifts with a serial interface, can maintain a continuous connection to network services that are part of Wireless Access Point infrastructure that shares the same ESS (Extended Service Set).

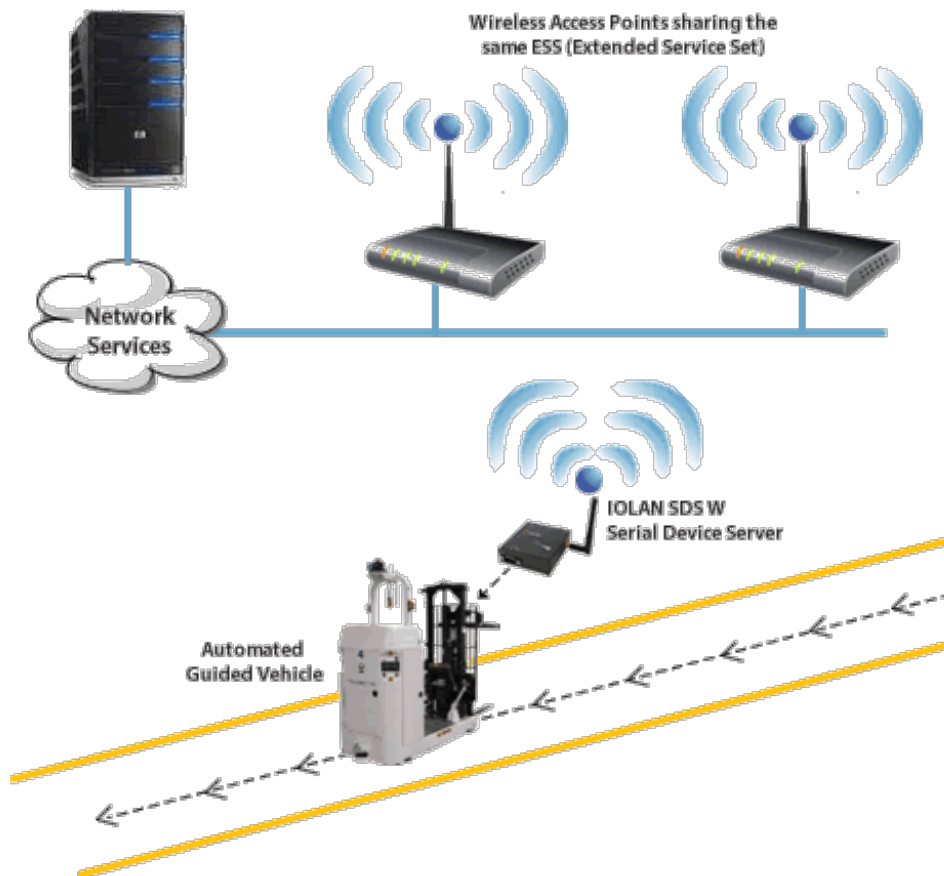

TCP

Using RAW TCP Sockets over Wireless LAN


A raw TCP socket connection which can be initiated from the serial-Ethernet device or from the remote host/server. This can either be on a point to point or shared basis where a serial device can be shared amongst multiple devices. TCP sessions can be initiated either from the TCP server application or from the Perle IOLAN W **serial-Ethernet** adapter.

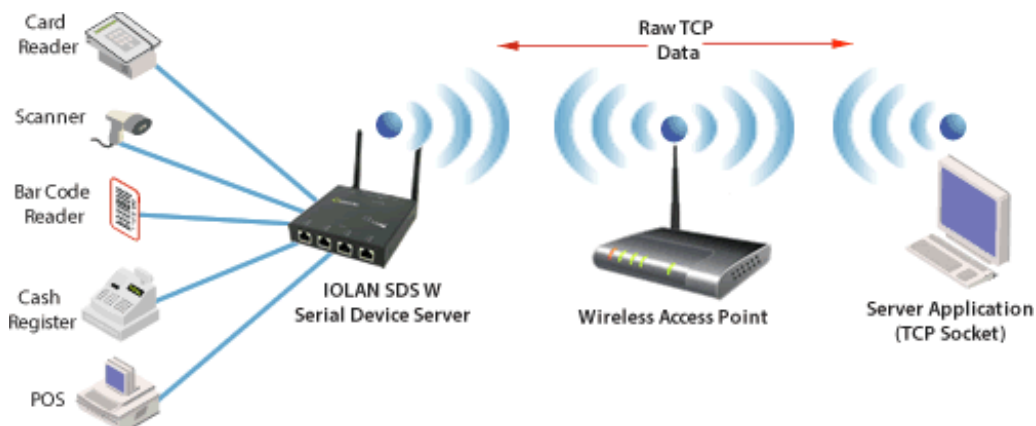

UDP

Using Raw UDP Sockets over Wireless LAN


For use with UDP based applications, Perle IOLANs can convert serial equipment data for transport across UDP packets either on a point to point basis or shared across multiple devices.

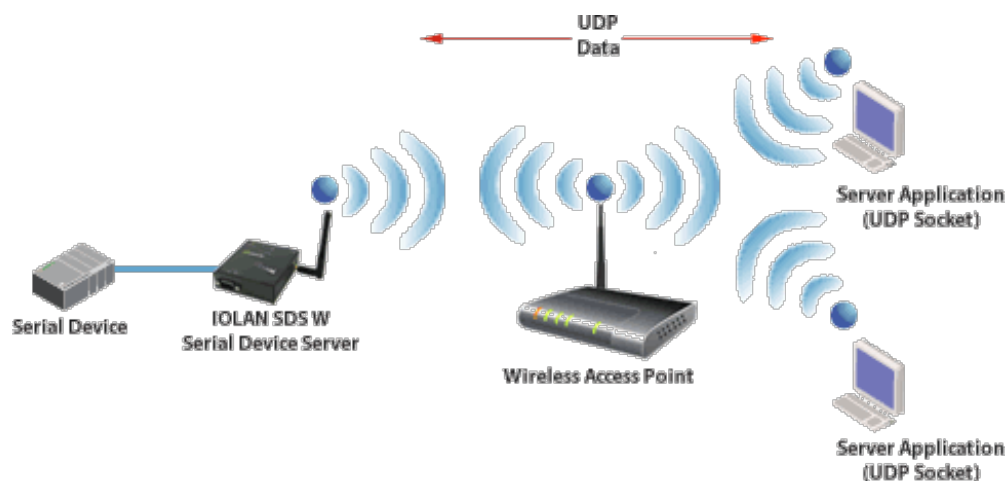

Console Server

Console Management over Wireless LAN


For access to remote console ports on routers, switches, etc. Perle IOLAN's enable administrators secure access to these RS232 ports via in-band Reverse Telnet / SSH over wireless LANs.

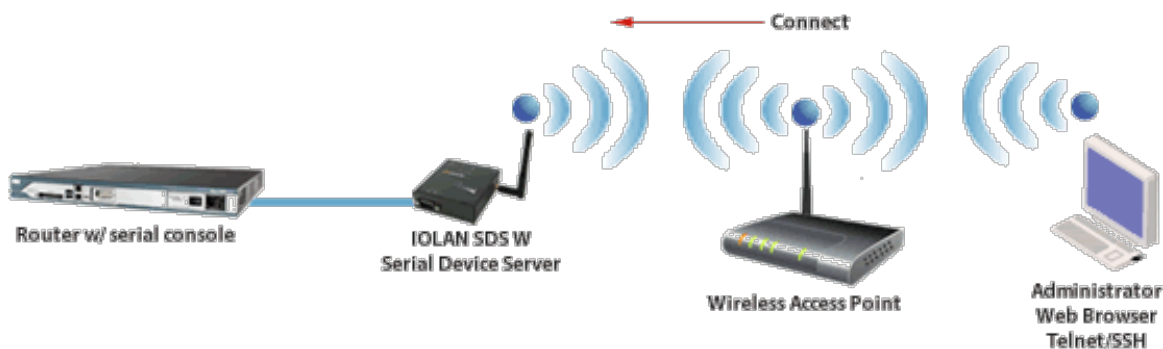

COM/TTY

Connect Serial-based Applications over Wireless LAN with a COM/TTY Port Driver

Serial ports can be connected to network servers or workstations running Perle's TruePort software operating as a virtual COM port. Sessions can be initiated either from the Perle IOLAN or from TruePort.

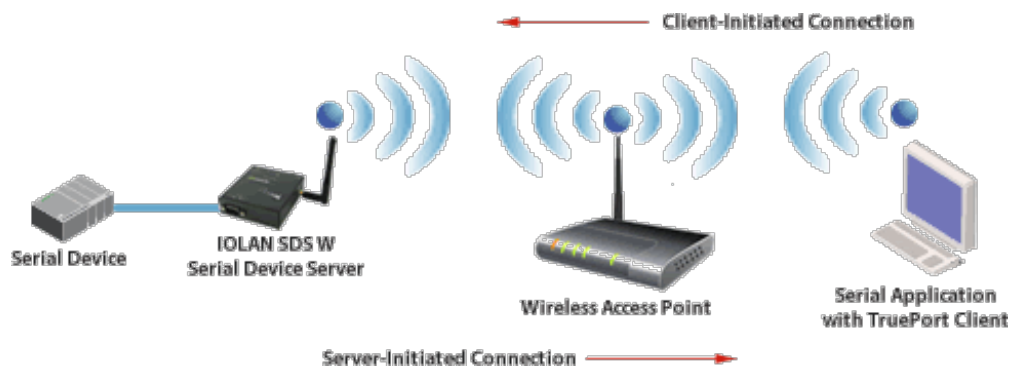

Serial Tunneling over Wireless

Serial Tunneling between two Serial Devices over Wireless Peer to Peer

Serial Tunneling enables you to establish a link across Ethernet to a serial port on another IOLAN. Both IOLAN serial ports must be configured for Serial Tunneling. Typically one serial port is configured as a Tunnel Server and the other serial port as a Tunnel Client.

