

NITE-XS

Unmanaged Industrial Ethernet Switches M12 IP65/67
Fast & Gigabit Ethernet



Cabinet-free networking directly in the field: Ruggedized with 2x Gigabit-Uplink-Port

- ▶ Flexible use with 24 VDC
- ▶ Ultra-compact, ruggedized design
- ▶ Temperature range -40 to +70°C
- ▶ Polarity protection
- ▶ IP65/67 metal housing
- ▶ Low power consumption
- ▶ DIN EN 50155 rail compliant
- ▶ Gigabit Uplink Ports

The ultra-compact M12 IP65/67 unmanaged Industrial Ethernet switches connect all applications efficiently and reliably in harsh industrial environments as well as in rail and commercial vehicles. With its wide temperature range, high shock and vibration resistance and rugged metal housing, the NITE-XS can be installed directly in the field outside the switch cabinet. Variants with X-coded M12 Gigabit ports provide sufficient bandwidth for demanding applications. The Plug&Play switches provide a robust and reliable Ethernet communication directly in the application, saving cabinet space and reducing the cabling effort. An excellent EMC performance characteristics and fire protection according to DIN EN 45545, make the NITE-XS Ethernet switches fully suitable for railways and comply with DIN EN 50155.

General

Switch: IEEE802.3 Store and Forward; non-blocking wire speed
Auto-Negotiation, Auto-MDI-X, Auto-Polarity: Yes
Frame size: 1,522 Bytes
MAC table size: 2,000 addresses
Quality of Service: Yes
Energy Efficient Ethernet: No
Flow Control: Yes
PROFINET suitable: Yes

Port count (X-cod. + D-cod.) **2+8**

MTBF (SN 29500, Mio. h) 2.223

Frame Forwarding (Art.-No.) xxxxx0

LLDP, PTCP Delay 01:80:C2:00:00:0E Forwarding

RSTP BPDU 01:80:C2:00:00:00 Forwarding

Power supply / electronics

Nominal voltage: Vin 24 VDC
Permitted voltage range: 9 to 36 VDC
Connection type: Vin M12 A-cod. (+ -) | M4 thread drill hole (FE)
Supply circuit: SELV DIN 60950 (circuit breaker 10 A)
Redundant power supply: No
Inrush current limiter: No
Input fuse: Yes, Interrupting rating 50 A @ 125 VAC/VDC
Polarity protection: Yes
Power failure bridging: 5 ms
PCB Conformal Coating: Yes
Protection category: III
Isolation: 1.5 kVDC Vin ↔ Ethernet Ports | 2 kVDC Vin ↔ housing

Port count (X-cod. + D-cod.) **2+8**

Power consumption (W)

Idle | full load 0,72 | 2,9

Input current (mA)

Idle | full load 30 | 120

Mechanical properties

Housing material: Nickel-plated aluminium, stainless steel
Mounting: M6 hole for wall mounting, round head screw
IP Protection class (operation): IP65/67

Port count (M12) **2+8**

Width (mm) 65

Height (mm) 180

Depth (mm) 29,8

Weight (g) 470

Ethernet Interfaces 1

IEEE Standards: 802.3 10BaseT, 100BaseT(x)

Isolation: 1 kVDC Eth. Port ↔ housing | 2 kVDC Port ↔ Port

Connection type: M12 D-coded

Port count | Speed: 8 | 10/100 Mbit/s

Cable length: 100 m (Twisted Pair, 0.14 mm² - 0.22 mm², Cat 5)

Ethernet Interfaces 2

IEEE Standards: 802.3 100BaseT(X), 1000BaseT, 2.5BaseT

Isolation: 1 kVDC Eth. Port ↔ housing | 2 kVDC Port ↔ Port

Connection type: M12 X-coded

Ports | Speed: 1 | 100/1000 Mbit/s + 1 | 100/1000/2500 Mbit/s

Cable length: 100 m (Twisted Pair, 0.14 mm² - 0.22 mm², Cat 5)

EMC and environmental specifications

Operating temperature: -40°C to +70°C

Storage temperature: -40°C to +85°C

Relative humidity (operation): 0%-95% (not condensing)

Relative humidity (storage): 0%-95% (not condensing)

Atmospheric pressure (operation): 2,000 m (795 hPa)

EMC immunity: DIN EN - 50121-3-2, 61000-6-2, 55024

EMC radiated emission: DIN EN - 50121-3-2, 61000-6-4, 55032

Mechanical stability: DIN EN 61373

Fire protection: DIN EN 45545


Approvals and certifications

CE, DIN EN 50155, DIN EN 60950-1, ITxPT

Status and diagnostic indicators

LED: Power | Link/Activity/Speed per Port

Drawing

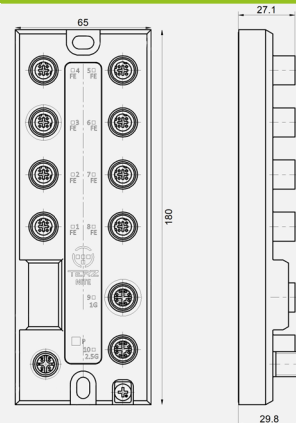

Products

Article	Art.-No.	Specification
NITE-XS82-3100	4314200	8xM12 FE+2xM12 GE

