



RUGGED EMBEDDED COMPUTER

RCO-1000-EHL-20

Fanless Mini Computer with Intel® Atom® X6425E Processor, 2x DP, 2x COM, 1x 2.5" SATA HDD Bay

Features

- Support Intel® Atom® X6425E
- 1x 260-pin DDR4 SODIMM. Max. up to 32GB
- Dual Independent Display by 2x Display Port
- 1x 2.5GbE, 1x GbE supporting (Wake-on-LAN and PXE)
- 1x 2.5" SATA HDD Bay, 1x mSATA,
- 1x M.2 (B Key, 2242/3042/3052, Support 4G/5G)
- 1x Full-size mini PCIe for communication or expansion modules
- 2x RS-232/422/485, 3x USB 3.2 Gen2, 1x USB 2.0
- 9 to 36VDC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature -40°C to 70°C
- TPM 2.0 Supported
- With 3x Universal Expansion Slots
- Edge AI Ready with Hailo-8™ (26 TOPS / 2.5W)
- UL Listed



Specifications


System	
Processor	Supports 11th Gen Intel® Atom® Processor (Elkhart Lake) - Intel® Atom® Processor X6425E, Quad Core, 1.5 MB Cache, 1.8 GHz, 12W TDP
System Chipset	SoC integrated
LAN Chipset	1 GbE1: Intel I210 (Support Wake-on-LAN and PXE) 2.5 GbE2: Intel I225 (Support Wake-on-LAN and PXE)
Audio Codec	Realtek ALC888S
System Memory	1x 260-Pin DDR4 2400/2667/3200MT/s SODIMM. Max. up to 32 GB
Graphics	Intel® UHD Graphics
BIOS	AMI 256Mbit SPI BIOS
Watchdog	Software Programmable Supports 1~255 sec. System Reset
AI Accelerator	Supports 1x Hailo-8™ module
TPM	TPM 2.0
Display	
Display Port	2x DisplayPort 1.4, DP++ (4096 x 2160@60Hz)
Multiple Display	Dual Display
Storage	
M.2	1x M.2 (B Key, 2242/3042/3052, PCIe x1 + USB 3.2 Gen2, Support 4G/5G Module)
mSATA	1x mSATA (shared by 1x Mini PCI Express)
SIM Socket	2x External SIM socket
SSD/HDD	1x Internal 2.5" SATA HDD Bay (support H=9.5 mm)
Expansion	
Mini PCIe	1x Full-size Mini PCIe
Expansion Modules	Optional: • 2-port COM module with Super I/O Chipset, Support 2x Universal Slot Only • 4-Port USB module with USB hub, Support 1x Universal Slot Only • 1-Port DP 1.4 and DIO (4 in / 4 out, Isolated), Support 1x Universal Slot Only • 1-Port HDMI 2.0, Support 1x Universal Slot Only
I/O	
Audio	1x Mic-in, 1x Line-out
CAN	2x CAN 2.0 A/B 2-pin Internal header
COM	2x RS-232/422/485
LAN	2x RJ45 (2.5 & 1 GbE)
Universal I/O Bracket	3x Universal I/O Bracket (By mini PCIe interface, Proprietary Module)
USB	3x USB 3.2 Gen 2 (10 Gbps) 1x USB 2.0
Others	5x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off 1x Internal CMOS Battery Cable 1x 4-PIN FAN Connector
Operating System	
Windows	Windows 10/11
Linux	Linux Kernel
Power	
Power Adapter	Optional AC/DC 12V/5A, 60W
Power Mode	AT, ATX
Power Ignition Sensing	Adjustable power ignition management can be achieved through BIOS and optional daughter board.
Power Supply Voltage	9~36VDC
Power Connector	3-pin Terminal Block

Power Protection	OVP (Over Voltage Protection); OCP (Over Current Protection) Reverse Protection
------------------	---

Environment	
Operating Temperature	-40°C to 70°C
Storage Temperature	-40°C to 85°C
Relative Humidity	10% to 95% (non-condensing)
Certification	UL 62368 Ed. 3, CE, FCC Class A
Vibration	With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
Shock	With SSD: 50G, half sine, 11ms
Physical	
Dimensions	150 (W) x 105 (D) x 65 (H) mm
Weights	1 kg
Construction	Extruded Aluminum with Heavy Duty Metal
Mounting Options	Wall Mounting SIDE / VESA / DIN-Rail Mounting (Optional)

- For Intel® Atom® Processor x6425E operating temperature limited -40°C to 70°C
- Intel CPUs may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 4 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.
- All specifications and photos are subject to change without notice.

External I/O Mechanical Layout

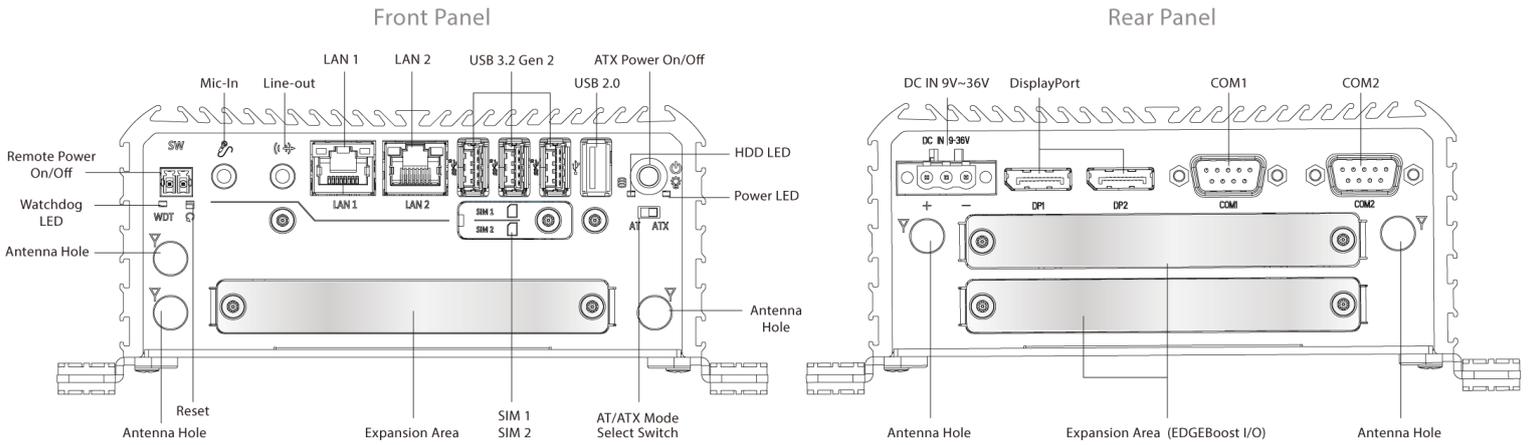

Available Expansion Module Options for Rear Panel



- 1x DP Port and 1x DIO (4 in / 4 out, Isolated) (Support 1x Universal Slot Only)



- 1x HDMI Port (Support 1x Universal Slot Only)




- 4x USB Ports (Support 1x Universal Slot Only)



- 2x COM Ports (Support 2x Universal Slot Only)

Dimension

Unit: mm

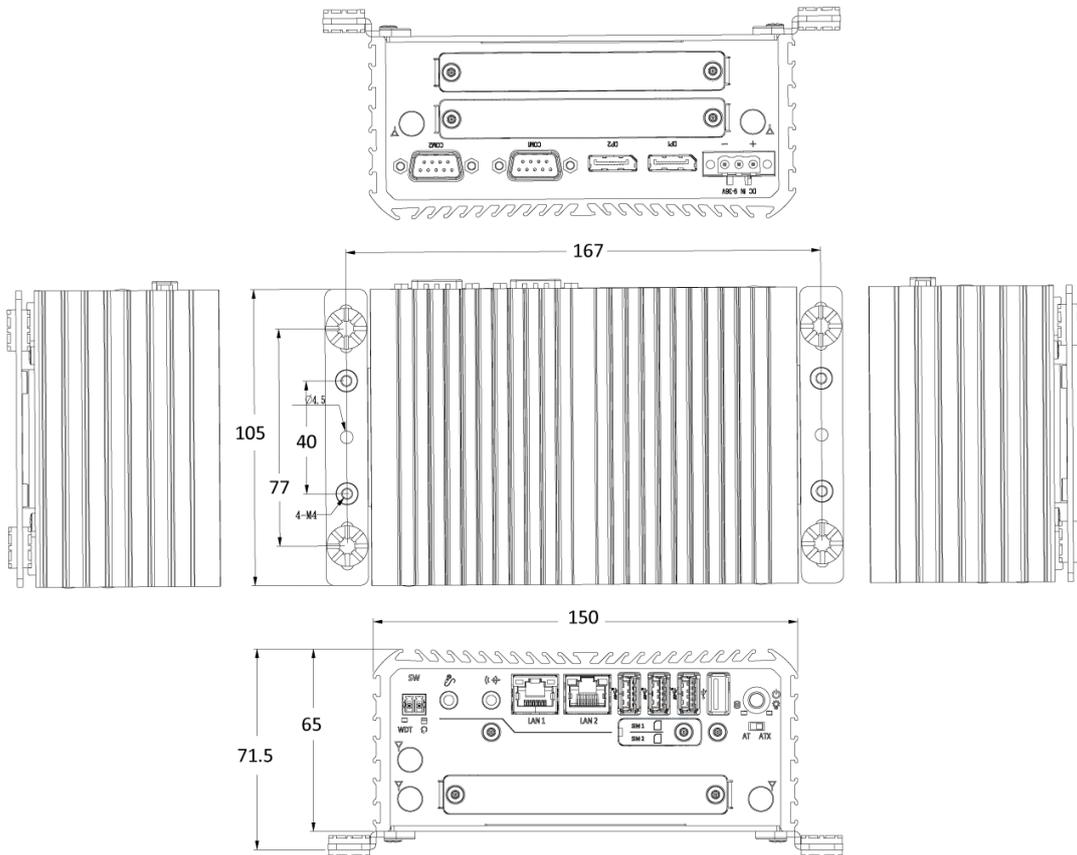

Available Models

Model No.	Description
RCO-1000-EHL-X6425E-20-P	Fanless Mini PC with Intel® Atom® X6425E (EHL) Processor, 2x EDGEBoost IO
RCO-1000-EHL-X6425E-20C-P	Fanless Mini PC with Intel® Atom® X6425E (EHL) Processor, DIO, 1x DP, 4x COM
RCO-1000-EHL-X6425E-20D-P	Fanless Mini PC with Intel® Atom® X6425E (EHL) Processor, 6x COM

Optional Accessories

Model No.	Description
1-E09A06008	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm
1-TPCD00005	Power Cord, 3-pin US Type, 180cm
3-SIDE-0003	RCO-1000-EHL-20 Series Side Mount Kit
3-VESA-0003	RCO-1000 Series VESA Mount Kit
3-DINR-0004	Din Rail-2 Mounting Kit
3-RC1200IGKIT-S0	MOD, PWR IGNITION, KIT, 1000-EHL
1000-EHL-20-5G-KIT	MOD, RCO-1000-EHL-20, 5G, THALES, KIT
1000-EHL-20-NVME-KIT	MOD, RCO-1000-EHL-20, NVME, KIT
1000-EHL-20-TPU-KIT	MOD, RCO-1000-EHL-20, TPU, HAILO-8, KIT
EBIO-2COM-34	MOD, EBIO, 2XCOM, 3, 4, 1000-EHL
EBIO-2COM-56	MOD, EBIO, 2XCOM, 5, 6, 1000-EHL
EBIO-4USB	MOD, EBIO, 4XUSB2.0, 1000-EHL
EBIO-DP-DIO	MOD, EBIO, DP, DIO, 4IN, 4OUT, 1000-EHL
EBIO-HDMI	MOD, EBIO, HDMI, 1000-EHL

Packing List

1x RCO-1000-EHL-20 Series Embedded System
 1x Wall Mount Kit
 1x Accessory Kit

Compliances and Standards

Shock	With SSD: 50G, half sine, 11ms IEC60068-2-27:2008 Designed to comply with MIL-STD-810G Method 516.7 Procedure I
Vibration	With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis IEC60068-2-64:2008 Designed to comply with MIL-STD-810G Method 514.7 Procedure I
Operating Temperature	-40°C to 70°C IEC60068-2-1:2007 (Cold test procedure) IEC60068-2-2:2007 (Dry heat test procedure) IEC60068-2-3:2007 (Damp heat, steady state, test procedure) IEC60068-2-14:2009 (Wide temperature range thermal shock)
EMC	<ul style="list-style-type: none"> FCC Class A CE ICES-003 UKCA Industrial EMC Compliance - EN 61000-4-2: 2009 - EN IEC 61000-4-3: 2020 - EN 61000-4-4: 2012 - EN 61000-4-5: 2014 +A1: 2017 - EN 61000-4-6: 2014
Safety	<ul style="list-style-type: none"> UL Safety: UL62368-1, 3rd Ed., (cULus) Test procedure: CB Scheme Standard: IEC 62368-1:2018

Exports And Tariff Codes

ECCN	5A992.c
HTS	8471.50.0150
ScheduleB	84.71

Premio Inc.

918 Radecki Ct., City of Industry
 CA 91748, United States
 Toll Free: 800.977.3646

Premio Taiwan Inc.

18F, No.176, Jianyi Road, Zhonghe District,
 New Taipei City 235603, Taiwan
 Toll Free: 886.2.7731.7888

Email: sales@premioinc.com
 Website: <https://premioinc.com>