

Product Discontinuance Notification—PDN0000387391

October 24, 2023

Dear Valued Customer,

We would like to inform you that Moxa is going to discontinue the UPort 1400 and UPort 1600 Series and launch the 1400-G2 and UPort 1600-8-G2 as its replacement. The reason for this discontinuation is that certain components of the UPort 1400 and UPort 1600 Series have reached their end of life.

This process will effectively begin on **November 01, 2023**

Discontinued Product	Last time buy starts	Last time buy ends
UPort 1410	November 01, 2023	November 01, 2024
UPort 1450		
UPort 1450I		
UPort 1610-8		
UPort 1650-8		
UPort 1610-16		November 01, 2025
UPort 1650-16		


Please review the details below to determine how this discontinuance will affect your products and/or operations.

Which product will be discontinued?



The following product will be discontinued. Also, see the models recommended to replace the soon to-be-discontinued models, as well as when the replacement models will be available for order.

Discontinued Product	Recommended Replacement Product	Available for Order
UPort 1410	UPort 1410-G2	As of immediate effect
UPort 1450	UPort 1450-G2	
UPort 1450I	UPort 1450I-G2	
UPort 1610-8	UPort 1610-8-G2	
UPort 1650-8	UPort 1650-8-G2	
UPort 1610-16	UPort 1610-8-G2 + UPort 1650-8-G2-Hub	
UPort 1650-16	UPort 1650-8-G2 + UPort 1650-8-G2-Hub	

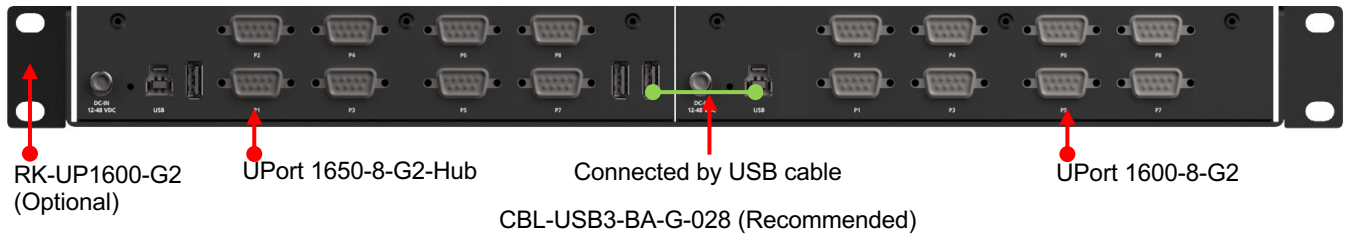

UPort 1650-8-G2-Hub + UPort 1600-8-G2 Concept Illustration



The major differences between the UPort 1400 and UPort 1400-G2, UPort 1600-8 and UPort 1600-8-G2 are listed below:

	UPort 1410 / 1450 / 1450I		UPort 1410-G2 / 1450-G2 / 1450I-G2		
					
USB standard	USB 2.0 (480 Mbps) and 1.1 (12 Mbps)		USB 3.2 Gen 1*1 (5 Gbps), USB 2.0 (480 Mbps) and 1.1 (12 Mbps)		
USB cable	Standard USB 2.0 cable		USB 3.2 Gen 1 cable with latch and screw		
Power adaptor	Optional for UPort 1410 Included for UPort 1450 and UPort 1450I		Optional		
Power consumption (mA & 12 VDC)	1410 & 1450	1450I	1410-G2	1450-G2	1450I-G2
	260	360	200	240	340
Dimensions	204 x 30 x 125 mm (8.03 x 1.18 x 4.92 in)		85 x 30 x 84 mm (3.35 x 1.18 x 3.31 in)		
Others	<ul style="list-style-type: none"> 128-byte FIFO 		<ul style="list-style-type: none"> 512-byte FIFO Double sided LED display Support wide temperature (-T model) 		

*1 USB 3.2 is backward compatible to USB 2.0 and USB 1.1

	UPort 1610-8 / 1650-8	UPort 1610-8-G2	UPort 1650-8-G2	UPort 1650I-8-G2	UPort 1650-G2-Hub
					
USB standard	USB 2.0 (480 Mbps) and 1.1 (12 Mbps)	USB 3.2 Gen 1 ^{*2} (5 Gbps), USB 2.0 (480 Mbps) and 1.1 (12 Mbps)			
USB cable	Standard USB 2.0 cable	USB 3.2 Gen 1 cable with latch and screw			
Power adaptor	Included	Optional	Optional	Included	Included
Power consumption (mA & 12 VDC)	580	260	350	530	2250
Dimensions	204 x 44 x 125 mm (8.03 x 1.73 x 4.92 in)	216 x 41.5 x 115.0 mm (8.50 x 1.63 x 4.53 in)			
Others	<ul style="list-style-type: none"> 128-byte FIFO 	<ul style="list-style-type: none"> 512-byte FIFO Double sided LED display Support wide temperature (-T model) 		<ul style="list-style-type: none"> 512-byte FIFO Double sided LED display With 3 USB type A downstream ports 	

*2 USB 3.2 is backward compatible to USB 2.0 and USB 1.1

As Moxa values the business partnership with your company, we would like to know how many units of both the **Recommended Replacement Product** and **Discontinued Product** you will require. We will do our best to reserve as many units as possible for you. However, **please note that last-buy orders will be subject to availability.** Please share your requirements with us before **April 01, 2024** for UPort 1400 models and UPort 1600-8 models, and **April 01, 2025** for UPort 1600-16 models.

Discontinued Product	Last Buy Period
UPort 1400 Models	Nov/01/2023 till Apr/01/2024
UPort 1600-8 Models	
UPort 1600-16 Models	Nov/01/2023 till Apr/01/2025

UPort 1400-G2 and UPort 1600-8-G2 model list:

Model Name	Description
UPort 1410-G2	USB to 4-port RS-232 serial hub, 0 to 60°C (32 to 140°F)
UPort 1450-G2	USB to 4-port RS-232/422/485 serial hub, 0 to 60°C (32 to 140°F)
UPort 1450-G2-T	USB to 4-port RS-232/422/485 serial hub, -40 to 75°C (-40 to 167°F)
UPort 1450I-G2	USB to 4-port RS-232/422/485 serial hub, 2 kV isolation, 0 to 60°C (32 to 140°F)
UPort 1450I-G2-T	USB to 4-port RS-232/422/485 serial hub, 2 kV isolation, -40 to 75°C (-40 to 167°F)
UPort 1610-8-G2	USB to 8-port RS-232 serial hub, 0 to 60°C (32 to 140°F)
UPort 1650-8-G2	USB to 8-port RS-232/422/485 serial hub, 0 to 60°C (32 to 140°F)
UPort 1650-8-G2-T	USB to 8-port RS-232/422/485 serial hub, -40 to 75°C (-40 to 167°F)
UPort 1650I-8-G2	USB to 8-port RS-232/422/485 serial hub, 2 kV isolation, 0 to 60°C (32 to 140°F)
UPort 1650I-8-G2-T	USB to 8-port RS-232/422/485 serial hub, 2 kV isolation, -40 to 75°C (-40 to 167°F)
UPort 1650-8-G2-Hub	USB to 8-port RS-232/422/485 serial hub, with 3 downstream USB type A ports, 0 to 60°C (32 to 140°F)

If you have any questions, please contact your regional sales representative for business related questions, and Fangping Cheng FangpingFP.Cheng@moxa.com for product related ones.