



Manage this device with Digi Remote Manager

# ANYWHEREUSB PLUS

Connect USB peripheral devices anywhere on a Local Area Network (LAN) without a locally-attached host computer

IoT business automation requires communication with various IT assets and peripherals located across an enterprise. AnywhereUSB® Plus remote USB hubs give users the simplest and most direct connection options for existing equipment with a variety of USB 3.1 Gen 1 port options. All three models have Gigabit Ethernet support for failover redundancy and network bonding with SFP+ ports in the 8 and 24-port models for higher speeds or fiber networks.

AnywhereUSB 24 Plus is rack mountable with 24 USB 3.1 Gen 1 ports, while AnywhereUSB 8 Plus and AnywhereUSB 2 Plus are desktop or panel mountable units with eight or two ports, respectively, and support for Gigabit Ethernet.

## FEATURES AND BENEFITS

- Network-attached USB hubs easily connect USB peripheral devices to a PC from remote or virtual hosts
- Ideal for connecting USB devices over the network in virtualized environments such as VMware®
- AnywhereUSB 24 Plus is rack mountable with two power supplies and Ethernet connections for failover redundancy
- Access and monitor USB and serial devices over TCP/IP connection
- Supports multi-host connectivity for each USB port or group independently
- Supports Digi Remote Manager® cloud-based management platform to deploy, monitor and manage devices

## RELATED PRODUCTS




Digi® TX54    Digi ConnePort® TS    Digi 6310-DX    Accessories    Digi Remote Manager®

AnywhereUSB can be coupled with **Digi Remote Manager®**, a web-based device configuration and security management platform, to help users reduce downtime. An intuitive user experience makes installation smooth and easy; with quick setup and configuration to monitor and maintain larger installations of remote Digi and third-party devices.

For enterprise and industrial customers who need remote or local USB ports and the higher speeds of USB 3.1 Gen 1 and Gigabit/10 Gigabit Ethernet, Digi AnywhereUSB Plus products give you an industry-leading connectivity solution.

## APPLICATION EXAMPLE

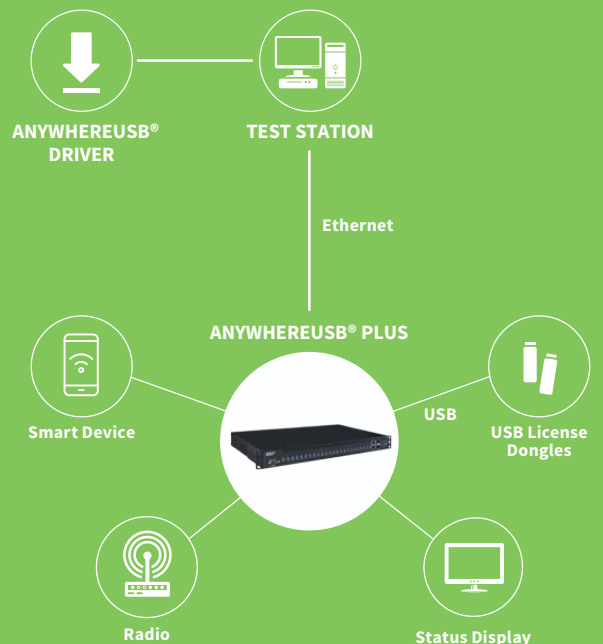

## SPECIFICATIONS

## ANYWHEREUSB® 2 PLUS

## ANYWHEREUSB® 8 PLUS

## ANYWHEREUSB® 24 PLUS

## CELLULAR

MODULE SUPPORT	-	(1) Digi CORE® modem compliant socket	(1) Digi CORE® modem compliant socket
----------------	---	---------------------------------------	---------------------------------------

## SOFTWARE AND MANAGEMENT

REMOTE MANAGEMENT	Digi Remote Manager® (cloud based)		
-------------------	------------------------------------	--	--

LOCAL MANAGEMENT	WebUI (HTTP/HTTPS); CLI (SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)
------------------	-------------------------------	--	--

OPERATING SYSTEMS	Windows® 7, 8.1 and 10; Windows Server® 2012 R2, 2016 and 2019		
-------------------	--	--	--

PROTOCOLS	Supports multi-host connectivity for each USB port or group independently		
-----------	---	--	--

MEMORY	512 MB RAM, 4 GB flash (eMMC)	2 GB RAM, 4 GB flash (eMMC)	2 GB RAM, 4 GB flash (eMMC)
--------	-------------------------------	-----------------------------	-----------------------------

## NETWORK

ETHERNET	(1) RJ-45; 10/100/1000 Mbps	(1) RJ-45; 10M/100M/1G/10G	(2) RJ-45; 10M/100M/1G/10G
----------	-----------------------------	----------------------------	----------------------------

SFP+	-	(1) SFP+ socket	(2) SFP+ sockets
------	---	-----------------	------------------

## CONNECTORS

CONSOLE	-	(1) DB09M; RS-232 DTE	
---------	---	-----------------------	--

USB	(2) USB 3.1 Gen 1 Type A	(8) USB 3.1 Gen 1 Type A	(24) USB 3.1 Gen 1 Type A
-----	--------------------------	--------------------------	---------------------------

## PHYSICAL

DIMENSIONS (L X W X H)	118 mm x 74 mm x 30 mm (4.6 in x 2.9 in x 1.2 in)	260mm x 160 mm x 44.45 mm (10 in x 6 in x 1.75 in)	450.85 mm x 255 mm x 44.45 mm (17.75 in x 10 in x 1.75 in)
------------------------	---	--	--

WEIGHT	0.38 kg (0.84 lb)	1.58 kg (3.48 lb)	4.7 kg (10.36 lb)
--------	-------------------	-------------------	-------------------

STATUS LEDS	(2) Ethernet, 2 (x1) USB, power	(2) Ethernet, (2) SFP+ 8 (x1) USB, power, fan, user, (3) future Wi-Fi/WWAN	2 (x2) Ethernet, 2 (x2) SFP+, 24 (x1) USB, 2 (x1) PSU, 2 (x1) fan, user, (3) future Wi-Fi/WWAN
-------------	---------------------------------	--	--

## POWER REQUIREMENTS

POWER INPUT	5 V, 5 A max	12 VDC, 12 A max	100-240 V, 3 A max (2 supplies for redundancy)
-------------	--------------	------------------	---

POWER CONSUMPTION	25 watts max	98.5 watts max	157.7 watts max
-------------------	--------------	----------------	-----------------

## ENVIRONMENTAL

OPERATING TEMPERATURE	0° C to 40° C (32° F to 104° F)	0° C to 55° C (32° F to 131° F)	0° C to 55° C (32° F to 131° F)
-----------------------	---------------------------------	---------------------------------	---------------------------------

RELATIVE HUMIDITY	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
-------------------	----------------------------	----------------------------	----------------------------

## APPROVALS

SAFETY	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368	UL/EN60950, UL/EN62368 and CSA 22.2	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368
--------	--	-------------------------------------	--

EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032
--------------------	--	--	--

## WARRANTY

PRODUCT WARRANTY	5-year
------------------	--------

## ENTERPRISE SOFTWARE

## DESCRIPTION

PROTOCOL SUPPORT	HTTPS, FTP, SFTP, SSL, SMTP, SSH and CLI for web management; remote management via Digi Remote Manager®
------------------	---


SECURITY/VPN	TLS 1.2, SSH, HTTPS
--------------	---------------------

ROUTING/FAILOVER	Ethernet bonding (only for AnywhereUSB® 24 Plus)
------------------	--


OTHER PROTOCOLS	DHCP
-----------------	------

# PRODUCT IMAGES


ANYWHEREUSB 2 PLUS FRONT

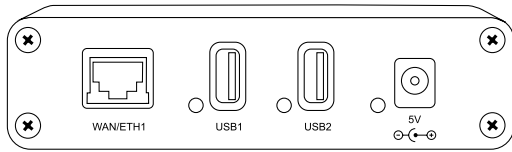


ANYWHEREUSB 2 PLUS BACK

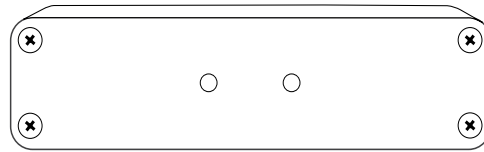


ANYWHEREUSB 8 PLUS FRONT

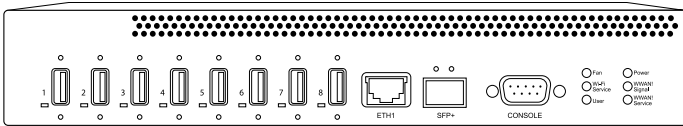


ANYWHEREUSB 8 PLUS BACK

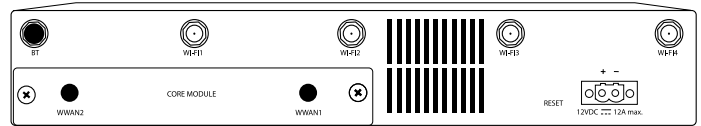

ANYWHEREUSB 24 PLUS FRONT



ANYWHEREUSB 24 PLUS BACK



PART NUMBERS	ANYWHEREUSB® PLUS MODELS
<b>ANYWHEREUSB 2 PLUS MODEL</b>	
AW02-G300	AnywhereUSB 2 Plus; dual USB 3.1 Gen 1 ports, single 10M/100M/1G Ethernet, 5 VDC (power supply sold separately)*
<b>ANYWHEREUSB 8 PLUS MODEL</b>	
AW08-G300	AnywhereUSB 8 Plus; eight USB 3.1 Gen 1 ports, single 10M/100M/1G/10G Ethernet, single SFP+, 12 VDC
<b>ANYWHEREUSB 24 PLUS MODEL</b>	
AW24-G300	AnywhereUSB 24 Plus; 24 USB 3.1 Gen 1 ports, dual 10M/100M/1G/10G Ethernet, dual SFP+, dual power 100-240 VAC

\*AnywhereUSB® 2 Plus requires a power supply or DC power source, see AnywhereUSB 2 Plus accessories listed below for details.

PART NUMBERS	ANYWHEREUSB® 2 PLUS ACCESSORIES - RECOMMENDED POWER SUPPLY
76000965	AC power supply - extended temperature, universal plugs (US, EU, UK, AU) to 5 VDC - 2.5 mm locking barrel plug (6 A max)**

\*\*Recommended power supply for AnywhereUSB 2 Plus, provides full USB charging capability of 1.8 A per port.

PART NUMBERS	ANYWHEREUSB® 2 PLUS ACCESSORIES - ALTERNATE POWER SUPPLIES
76000934	AC power supply - US plug to 5 VDC - 2.5 mm locking barrel plug (3 A max)***
76000935	AC power supply - EU plug to 5 VDC - 2.5 mm locking barrel plug (3 A max)***
76002021	AC power supply - standard temperature, universal plugs (US, EU, UK, AU) to 5 VDC - 2.5 mm locking barrel plug (3 A max)***

\*\*\*Alternative power supply may be used with AnywhereUSB 2 Plus if USB port charging is not required.

PART NUMBERS	ANYWHEREUSB® 2 PLUS ACCESSORIES - DIN MOUNTING BRACKET
76000682	DIN rail mounting kit for AnywhereUSB 2 Plus

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2021 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91004384  
A15/121

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

