UP-2010

Enterprise Network Security Appliance with High-density Ports







Overview

Lanner UP-2010 is an enterprise-class 1U rackmount network security appliance with high-density Ethernet ports. Built with Intel® Atom™ C2000 processor, the appliance can offer efficient packet processing abilities and Intel® security instructions at low power consumption. In addition, UP-2010 also comes with Marvell® Prestera® processor to provide high-port density and 8 x GbE ports. The appliance is highly ideal for enterprise gateway controller, UTM, Switch or next-generation firewall.


Key Features

- High-port density with 24 1GbE RJ45 copper ports plus 2 x 10GbE SFP+
- Intel® Atom™ C2758 8-core, 2.4 GHz
- Marvell® Prestera® 98DX3035 packet processor
- Built-in Intel® QuickAssist acceleration technology
- Support DDR3 ECC memory





Dimensions (W x H x D): 431 x 44 x 366.2 mm

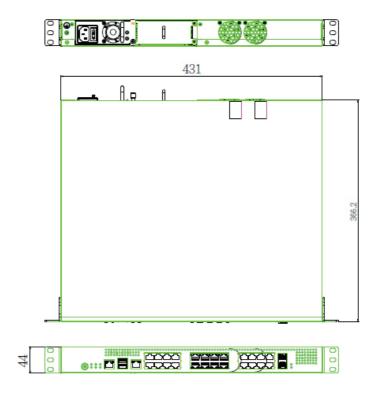

Preliminary Specifications

Form Factor Rackmount 1U	
s to the section of t	
Switching Fabric Marvell® Prestera® 98DX3035 switch solut	ion
Platform Processor Intel® Atom™ C2758 (4M Cache, 2.40 GHz	<u>z</u>)
10G PHY Intel® 82599EB	
1G PHY Marvell 88E1685	
Technology DDR3 1333 MHz, registered, ECC	
System Memory Max. Capacity 16 GB	
Socket 2 x 204-pin DIMM	
Storage SATA/CF 1 x CF Card, 1 x CFast (Optional), 1 x SATA 3 (Reserve only)	3.0 connector
Ethernet Ports 24 x GbE ports onboard + 2 x 10G SFP+	
Networking Bypass N/A	
Management Port 1	
Reset Button Yes	
I/O Interface Console 1 x RJ45 Cisco Type console port	
USB 2 x USB	
Display N/A	
Cooling Processor CPU heatsink	
System 2x cooling Fan with smart fan feature	
Environmental Temperature, ambient operating / storage 0 ~ 40° C / -20~70° C	
Humidity (RH), ambient operating 10~85%, non-condensing	
LCD Module N/A	
Miscellaneous Watchdog Yes	
Internal RTC with Li Battery Yes	
PhysicalDimensions (WxHxD)431 x 44 x 366.2 mm	
DimensionsWeight8.2 kg	
Power Supply Units 500 W ATX Power Supply Units	
Input 100~240V, 50~60Hz, 7-3.5A	
Approvals and Compliance CE Class A, FCC Class A, RoHS	



Ordering Information

UP-2010

Rackmount 1U Network Appliance with 24-port Gigabit Ethernet Switch and 2 x 10GbE SFP+ ports, 500 W ATX PSU

V2.0.0