


NB2700-LgW-G

Fahrzeug-Router mit LTE-APAC + WLAN + 5x ETH + GNSS + E-Mark

Modularer Mobilfunk-Router mit 5-Port Ethernet Switch für drahtlosen Internetzugang im Fahrzeug.

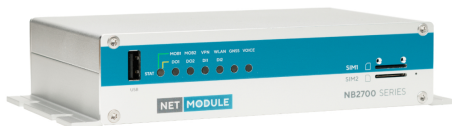

Hauptmerkmale

Mobilfunk	1x LTE, UMTS, GSM für APAC
SIM	2x Mini SIM
WiFi / WLAN	1x Dual-band IEEE 802.11a/b/g/n, 100 Clients im Access Point Mode
Ethernet	5x Fast Ethernet
IO	4x Digitale I/O
Serielle / Feldbus	1x RS-232
Ortung	Multi-GNSS
Betriebstemperatur	-25 °C bis +70 °C
Software	Routing, Network Services, VPN, Firewall, Link Management, Supervisor, SDK, freie Updates
Konformität	CE (RED), Fahrzeug (UN ECE R10, UN ECE R118)
Modularität	Erweiterungen auf Anfrage

Produktbeschreibung

Der NB2700 mit Fahrzeugzulassung ist ein robuster und vielfach im Feld bewährter Router, der mit seiner vielseitigen Ausstattung für diverse Anwendungen zum Einsatz kommt.

Anwendungen

- Blaulichtorganisationen
- Intelligenter Verkehr
- Passagier-WLAN
- Passagier-Infotainment
- Fahrkartensysteme
- Flottenmanagement
- Nachverfolgung

Spezifikation

Mobile / Cellular	Standard	1x Multimode LTE, UMTS, GSM for APAC 4G - LTE B1 (2100), B3 (1800), B5 (850), B7 (2600), B8 (900), B28 (750) 3G - DC-HSPA+/UMTS B1 (2100), B2 (1900), B5 (850), B8 (900) 2G - GSM/GPRS/EDGE B2 (1900), B3 (1800), B5 (850), B8 (900) Category LTE Cat 4 Antenna ports 2x2 MIMO Datarate down / up (max) 150 Mbps / 50 Mbps Voice CSFB FCC ID XPYTOBYL280
	Region	Asia and Pacific (APAC)
	Connectors	2x SMA female
	SIM	2x Mini SIM - 2FF

WiFi / WLAN	Standard	1x Dual-band WLAN 2.4/5 GHz a/b/g/n Wireless standard IEEE 802.11a/b/g/n Frequency 2.4/5 GHz Diversity 2x2 MIMO Datarate (max) 300 Mbps Modes Client or access point (up to 100 clients) FCC ID TK4WLE200NX
	Connector	2x SMA female

Ethernet	Standard	5x Fast Ethernet Ethernet standard 100BASE-TX, Auto MDIX Speed 10/100 Mbps
	Connector	5x RJ45

Positioning	Standard	1x Multi-GNSS Receiver BeiDou, Galileo, GLONASS, GPS/QZSS 72-channel u-blox M8 engine 3 concurrent GNSS channels Antennas Active or passive Accuracy Up to 2.5 m CEP Sensitivity Up to -167 dBm Services Standalone, Assisted GPS Data server with JSON, NMEA data stream
	Connector	1x SMA female
USB	Standard	1x USB 2.0 Host
	Connector	1x Type A
Serial, Fieldbus	Protocol	1x RS-232 Protocol EIA-232 Signals TX, RX Signal level High > 5 VDC, low < -5 VDC Bit rate Up to 1 Mbps
	Connector	1x Terminal block header 5 mm
IOs	Type	4x Digital I/O Signals 2x DI, 2x DO DI signals +, - DI level Low: 0 - 5 VDC, high: 7.2 - 40 VDC DO signals Relay outputs with NO, NC, COM (normally open, normally closed) DO level 0 - 60 VDC/1A Isolation 1'500 VDC
	Connector	1x Terminal block header 5 mm
System	Core	400 MHz single core, 64 MB RAM, 128 MB flash
	Module Slots	1x miniPCIe (PCIe + USB), 1x miniPCIe (USB)
Software	Features	NetModule Router Software Package The standard software package includes an intuitive user interface, covering all modern routing protocols and enables efficient mass deployment. General Fail-safe update (FOTA), upgrade via USB, HTTP(S), (S)FTP or TFTP, remote CLI & WebGUI, RADIUS authentication, Simple Certificate Enrollment Protocol (SCEP), logging Remote Management Manage and monitor devices with SNMP, telnet, SSH, or HTTP/HTTPS Cellular Networking Multi-SIM / soft-SIM support, multi-APN support, signal strength monitoring, dedicated bearers, GSM/CSFB calls Wireless LAN Client or Access Point mode, multi client support, multi / hidden SSID, WPA-PSK/WPA2-PSK, WPA-RADIUS, WPA-EAP-TLS, IEEE 802.11w, RADIUS accounting, CAPWAP Link Management Link prioritisation, link aggregation, load balancing, multipath-TCP, IP-passthrough, link supervision Network Services DHCP Client, DNS server, email, SMS service, NTP Client, NTP server, DynDNS, SSH server, SNMP agent, HTTP/HTTPS/FTP server, voice gateway, SIP call routing, coovachilli hotspot Routing Destination, policy, multipath, mobile-IP, OSPF, BGP, TCP-MSS clamping, STP/RSTP, bridging, LLDP, CDP, SONMP, EDP, FDP, IRDP, VRRP, VLAN, PPPoE VPN OpenVPN, IPsec, PPTP, GRE, CSD dial-in Firewall Stateful firewall, connection tracking, NAT, masquerading, bridge filtering
	Licenses	GNSS Enabled service GNSS location service Server with JSON-, NMEA stream
Power	Input Voltage	12, 24, 48 VDC Nominal voltages 12, 24, 48 VDC Absolute voltages 12 VDC to 48 VDC (-15 % / +20 %)
	Connector Consumption	1x Terminal block header 5 mm 6 W (max)
Mounting		Bracket
Dimensions	W x H x D	Width 165/190 mm x height 40 mm x depth 104 mm
Weight		700 g
Environment	Operating Temperature	-25°C to +70°C
	Ingress Protection Level	IP40

MTBF		310'000 h / 35.4 years, according SN29500 at environmental temperature 40 °C
Certifications	Compliance Domain	CE according to 2014/53/EU (RED), Vehicle according to UN ECE R10, UN ECE R118 Vehicle
Order Code		NB2700-LgW-G
