

VCO-6120-2060S

GPU Computing System with LGA 1151 for Intel 8th/9th Gen CPU & Q370 PCH, RTX 2060 Integrated, 2x Power Input



FEATURES

- Support 8th/9th Gen Intel® CFL-R S Processor (LGA 1151, 65W/35W TDP)
- Intel® Q370 Chipset
- 6 Display interface supported by 1x DVI-I, 1x DVI-D, 3x DisplayPort, 1x HDMI
- 2x Intel® GbE supporting Wake-on-LAN and PXE
- 2x Full-size mini PCIe (shared by 1x mSATA), and 2x SIM socket
- 4x 2.5" SATA HDD Bay with RAID 0, 1, 5, 10 support, 1x mSATA (Shared by 1x Mini PCIe)
- 1x M.2 (M Key, PCIe x4, 2280, Support NVMe), 1x M.2 (E Key, PCIe x2, 2230, USB 2.0, Support CNVi)
- 6x RS-232/422/485 (4x internal)
- 4x USB 3.2 Gen 2 (10 Gbps), 4x USB 3.2 Gen 1 (5 Gbps, internal)
- 8x DI + 8x DO with isolation
- 9 to 48V DC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature (-25°C to 60°C)
- TPM 2.0 Supported

SPECIFICATIONS

System

Processor	
Support 8 th /9 th Gen Intel® CFL-R S Processor (LGA 1151, 65W/35W TDP)	
- Intel® Core™ i7-9700E, 8 Cores, 12MB cache, up to 4.4 GHz	
- Intel® Core™ i5-9500E, 6 Cores, 9MB Cache, up to 4.2 GHz	
- Intel® Core™ i3-9100E, 4 Core, 6MB Cache, 3.7 GHz	
- Intel® Core™ i7-9700TE, 8 Cores, 12MB cache, up to 3.8 GHz	
- Intel® Core™ i5-9500TE, 6 Cores, 9MB Cache, up to 3.6 GHz	
- Intel® Core™ i3-9100TE, 4 Core, 6MB Cache, 3.2 GHz	
- Intel® Core™ i7-8700T, 6 Cores, 12MB cache, up to 4.0 GHz	
- Intel® Core™ i5-8500T, 6 Cores, 9MB Cache, up to 3.5 GHz	
- Intel® Core™ i3-8100T, 4 Cores, 6MB Cache, 3.1 GHz	
- Intel® Pentium® G5400T, 2 Cores, 4MB Cache, up to 3.1 GHz	
- Intel® Celeron® G4900T, 2 Cores, 2MB Cache, up to 2.9 GHz	

System Chipset	Intel® Q370 Express Chipset
LAN Chipset	GbE1: Intel I219LM (Support Wake-on-LAN and PXE) GbE2: Intel I210-AT (Support Wake-on-LAN and PXE)
Audio Codec	Realtek ALC888S
System Memory	2x 260-Pin DDR4 2400/2666MHz SODIMM. Max. up to 64GB (Un-buffered and Non-ECC)
BIOS	AMI 256Mbit SPI BIOS
Watchdog	Software Programmable Supports 1~255 sec. System Reset
TPM	TPM 2.0

Display

Graphics	Intel® UHD Graphics 610/630 or NVIDIA GeForce® RTX 2060 Super
DVI	1x DVI-I, 1x DVI-D
HDMI	1x HDMI
DisplayPort	3x DisplayPort, support resolution 4096 x 2304
Multiple Display	6 Display interfaces

Storage

SSD/HDD	2x Internal 2.5" SATA HDD Bay (support H=9mm) 2x Removable 2.5" SATA HDD Bay (support H=7mm, hot-swappable), Support RAID 0, 1, 5, 10
mSATA	1x mSATA (Shared by 1x Mini PCI Express)
M.2	1x M.2 (M Key, PCIe x4, 2280, Support NVMe), 1x M.2 (E Key, PCIe x2, 2230, USB 2.0, Support CNVi)
SIM Socket	2x Internal SIM socket

Expansion

Mini PCI Express	2x Full-size Mini PCIe (1x shared by 1x mSATA)
------------------	--

Operating System

Windows	Windows 10
Linux	Linux kernel 5.X

I/O

COM	2x RS-232/422/485 4x RS-232/422/485 (internal)
USB	4x USB 3.2 Gen 2 (10 Gbps) 4x USB 3.2 Gen 1 (5 Gbps, internal)
LAN	2x RJ45
DIO	8 in / 8 out (Isolated)
Universal I/O Bracket	2x Universal I/O Bracket (By mini PCIe interface)
Others	4x WiFi Antenna Holes 1x Power Switch 1x Remote Power On/Off

Power

Power Mode	AT, ATX
Power Supply Voltage	9~48VDC, 12~48VDC for GPU
Power Ignition Sensing	Power Ignition Management
Power Connector	3-pin Terminal Block, 3-pin or 4-pin Terminal Block for GPU
Power Adaptor	Optional AC/DC 24V, 220W/ 280W Optional AC/DC 24V, 280W for GPU
Power Protection	OVP (Over Voltage Protection); OCP (Over Current Protection) Reverse Protection

Environment

Operating Temp.	-25°C to 60°C (35 / 65W CPU)
Storage Temp.	-30°C to 85°C
Relative Humidity	10% to 95% (non-condensing)
Vibration	With SSD: 3 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
Shock	With SSD: 20G, half sine, 11ms
Standards / Certification	CE, FCC Class A

Physical


Construction	Extruded Aluminum with Heavy Duty Metal
Dimension	137 (W) x 340 (D) x 240 (H) mm
Weight	10.1 kg
Mounting	Wall Mounting / Book mounting (Optional)

* For 8th/9th CPUs configured to run at 65W, operating temperatures will be limited to 60°C.

** 65W CPUS may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 8 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.


*** All specifications and photos are subject to change without notice.

EXTERNAL I/O MECHANICAL LAYOUT

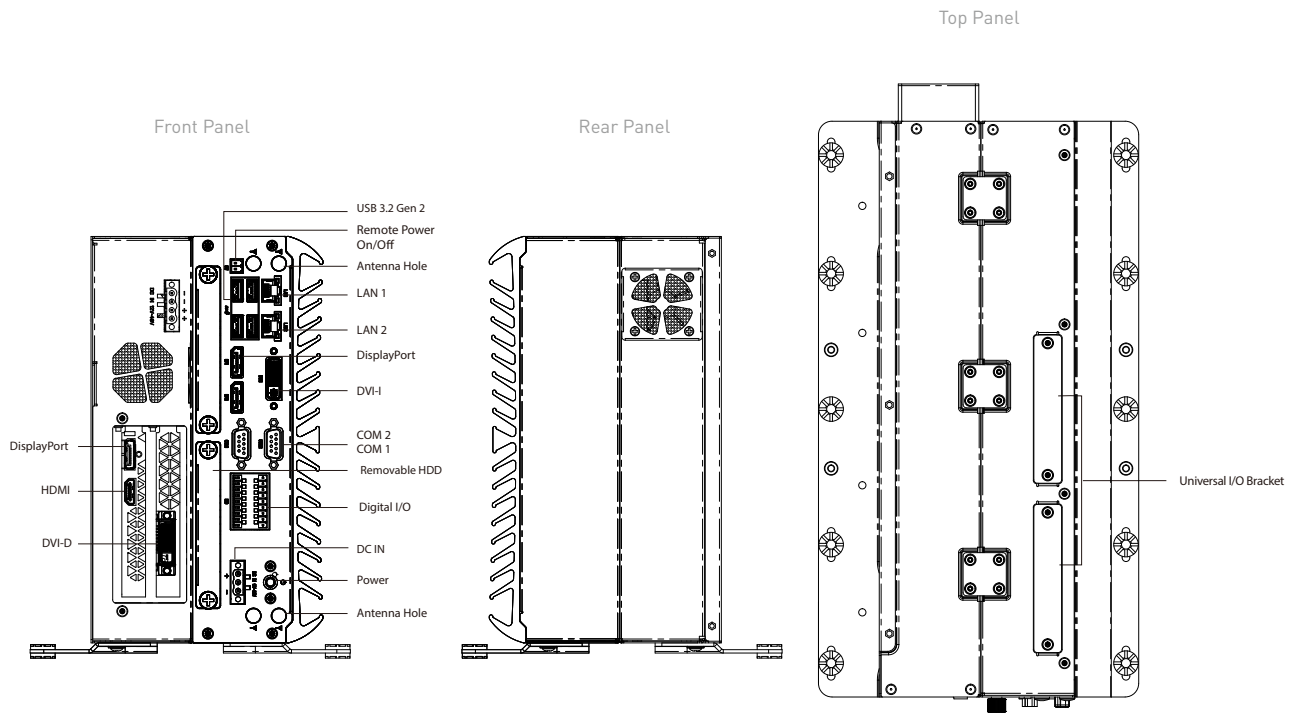

DIMENSION

Unit: mm

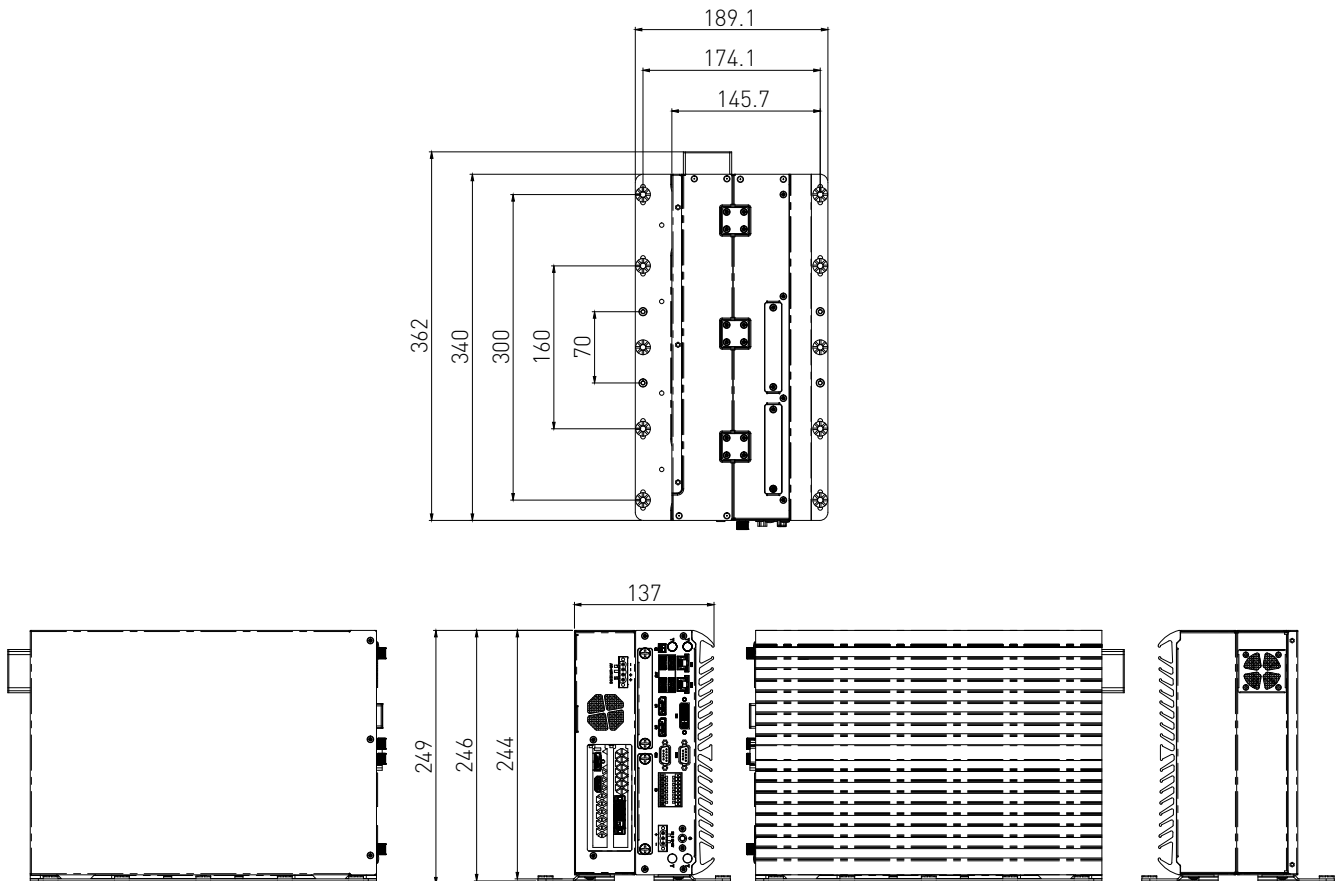

ORDERING INFORMATION

MODEL NO.	DESCRIPTION
1-E09A22801	Adapter AC/DC 24V/11.67A 280W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A22102	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug 5.0mm Pitch
SFICBL022	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

PACKING LIST

- 1x VCO-6100 Series Embedded System
- 1x Utility DVD Driver
- 1x Wall Mount Kit
- 1x Accessory Kit
- 1x DVI to VGA Adapter

AVAILABLE MODELS

MODEL NO.	DESCRIPTION
VCO-6120-2060S	GPU Computing System with LGA 1151 for Intel 8th/9th Gen CPU & Q370 PCH, RTX 2060 Integrated, 2x Power Input